A4

This is a fixed installation all connections should be carried out by a competent person.

The control switch must be installed for maintenance reasons.

All cables supplied at 2m, extendable to 10m with appropriate cable.

For automatic operation the thermostat needs to be switched on. For manual operation using the control switch the thermostat needs to be switched off.

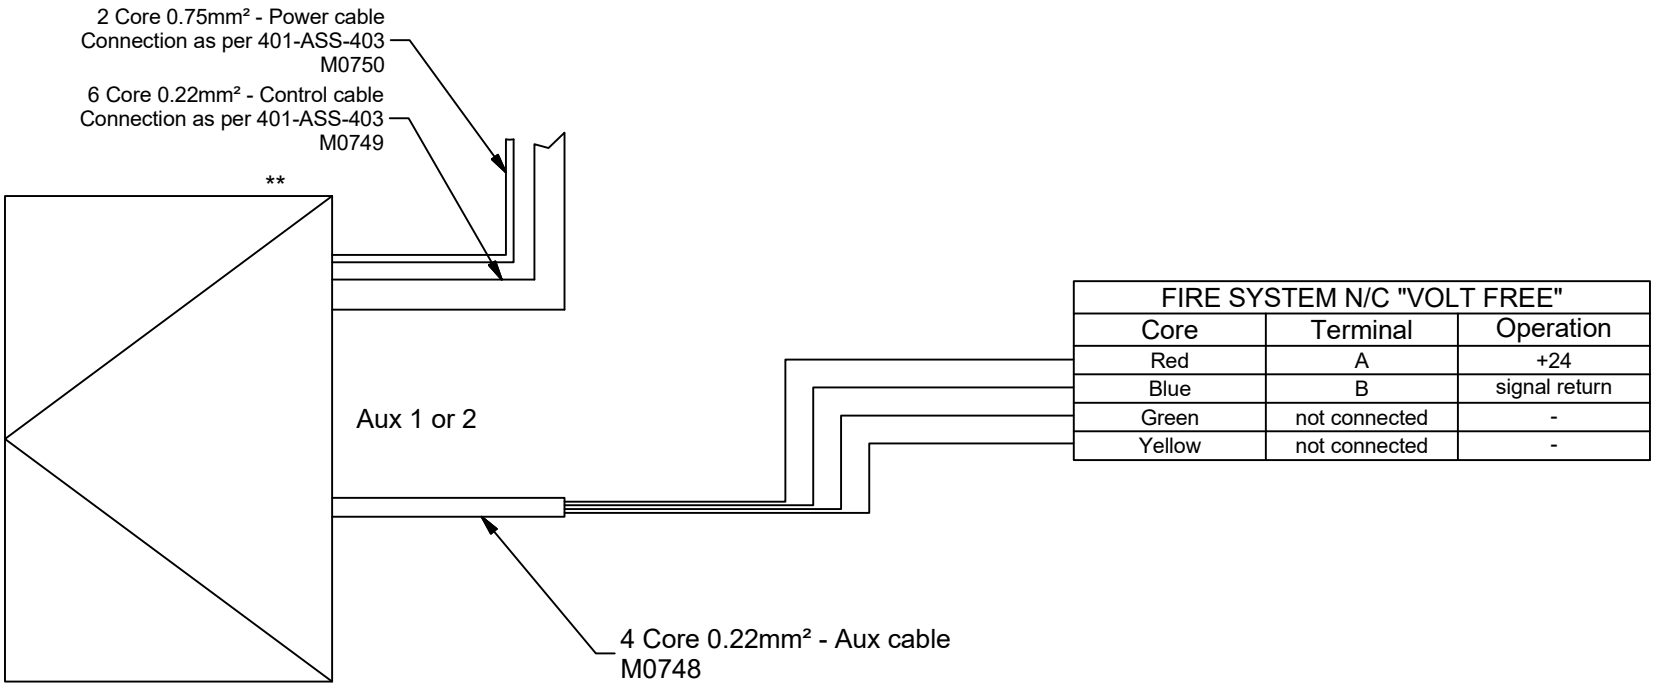

FIRE SYSTEM N/C "VOLT FREE"		
Core	Terminal	Operation
Red	A	+24
Blue	B	signal return
Green	not connected	-
Yellow	not connected	-

**Cables exit from the underside refer to kerb drawing 401-ASS-401 for detailed exit position

All optional items must be specified at time of order

GLAZING VISION

Saw Mills Road
Diss
Norfolk
IP22 4RG

Tel: +44 (0)333 8000 881
Fax: +44 (0)333 8000 882
Email: sales@glazingvision.co.uk
Website: www.glazingvision.co.uk

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.

Third angle projection unless otherwise noted.
Tolerances:
Whole numbers = ±1mm
One decimal place = ±0.5mm
Two decimal places = ±0.2mm
All angles 90±0.5 degrees unless specified
IF IN DOUBT - ASK! DO NOT SCALE
Supplier to deburr & remove sharp corners

Rev	Revision Description	Drawn/ Date
-	Initial release	SW 11.09.18

Product: 401- GV Standard Visionvent
Description: Visionvent fire system wiring diagram
Materials: N/A
Finish: N/A
Weight:
Quantity: N/A
Scale: N/A
Drawn By: SW
Drawn Date: 11.09.18
Checked By: MM
Check Date: 11.09.18
Drawing No: 401-ASS-421