
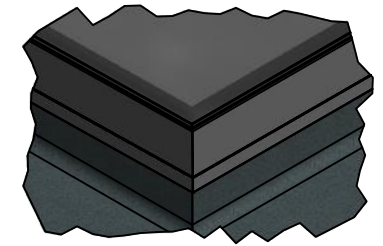
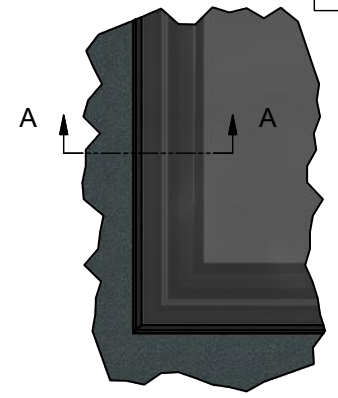


Section A-A (Scale 1 : 2)

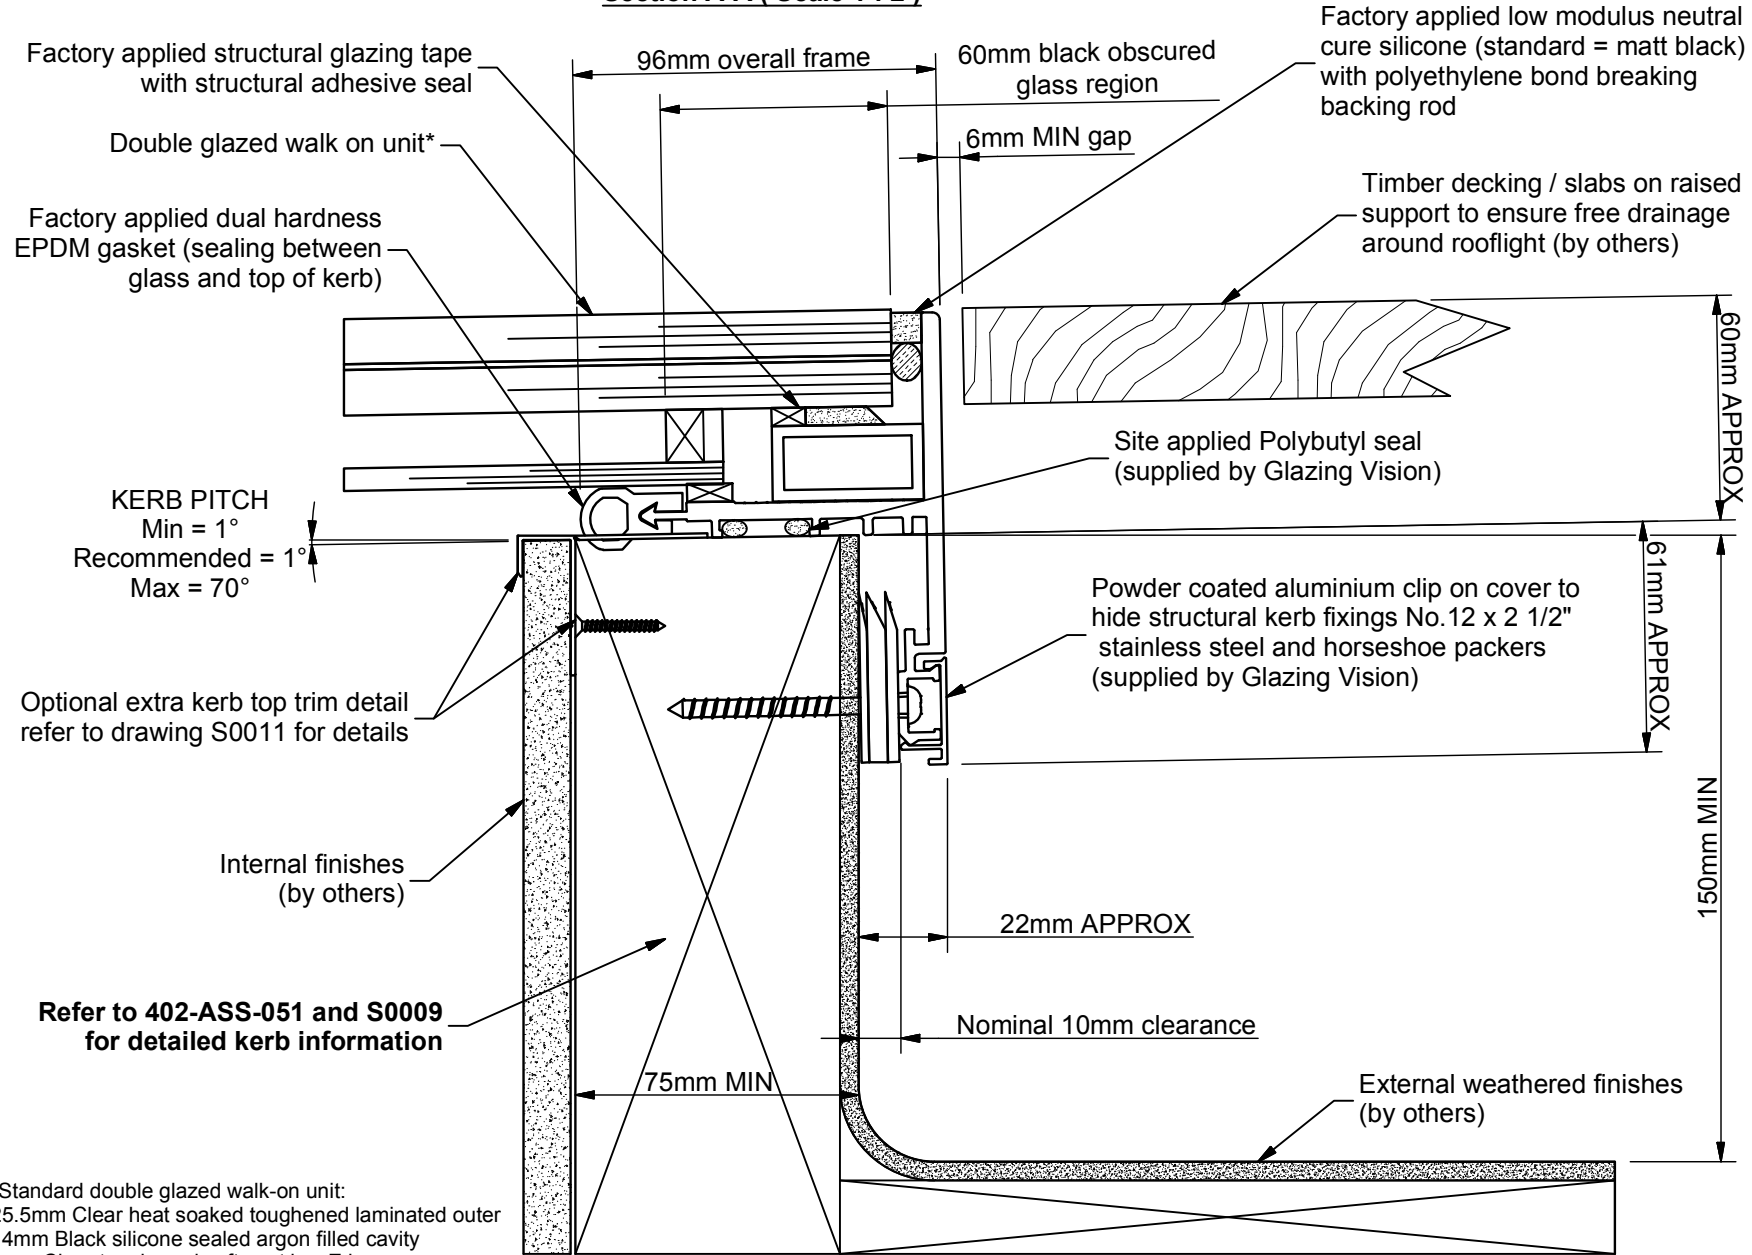

*Standard double glazed walk-on unit:
 25.5mm Clear heat soaked toughened laminated outer
 14mm Black silicone sealed argon filled cavity
 6mm Clear toughened soft coat low E inner

GLAZING VISION
 Saw Mills Road
 Diss
 Norfolk
 IP22 4RG
 Tel: +44 (0)333 8000 881
 Fax: +44 (0)333 8000 882
 Email: sales@glazing-vision.co.uk
 Website: www.glazing-vision.co.uk

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. AND THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THEIR WRITTEN PERMISSION.

Third angle projection unless otherwise noted.
 Tolerances:
 Whole numbers = ±1mm
 One decimal place = ±0.5mm
 Two decimal places = ±0.2mm
 Angular = ±0.5 degree
IF IN DOUBT - ASK! DO NOT SCALE
Supplier to deburr & remove sharp corners

Rev	Revision Description	Drawn/Date
N	Re-drawn and changed to new profile	James B 03.10.12
O	Amended to new standard glass specification for Eurocode compliance (NA BS EN 1991-1-1 2002)	PGW 08.08.13

Product: 402 - GV Standard Flushglaze	
Description: Walk on Flushglaze kerb mount detail	
Materials: As above	
Finish: Std = RAL7015 Grey matt	Drawn By: JamesB
Weight: N/A	Drawn Date: 03.10.12
Quantity: N/A	
Scale: 1:2 @ A4	

Checked By:

Check Date:

Drawing No: 402-ASS-003