


Section B-B (Scale 1:5)
(Along fall)

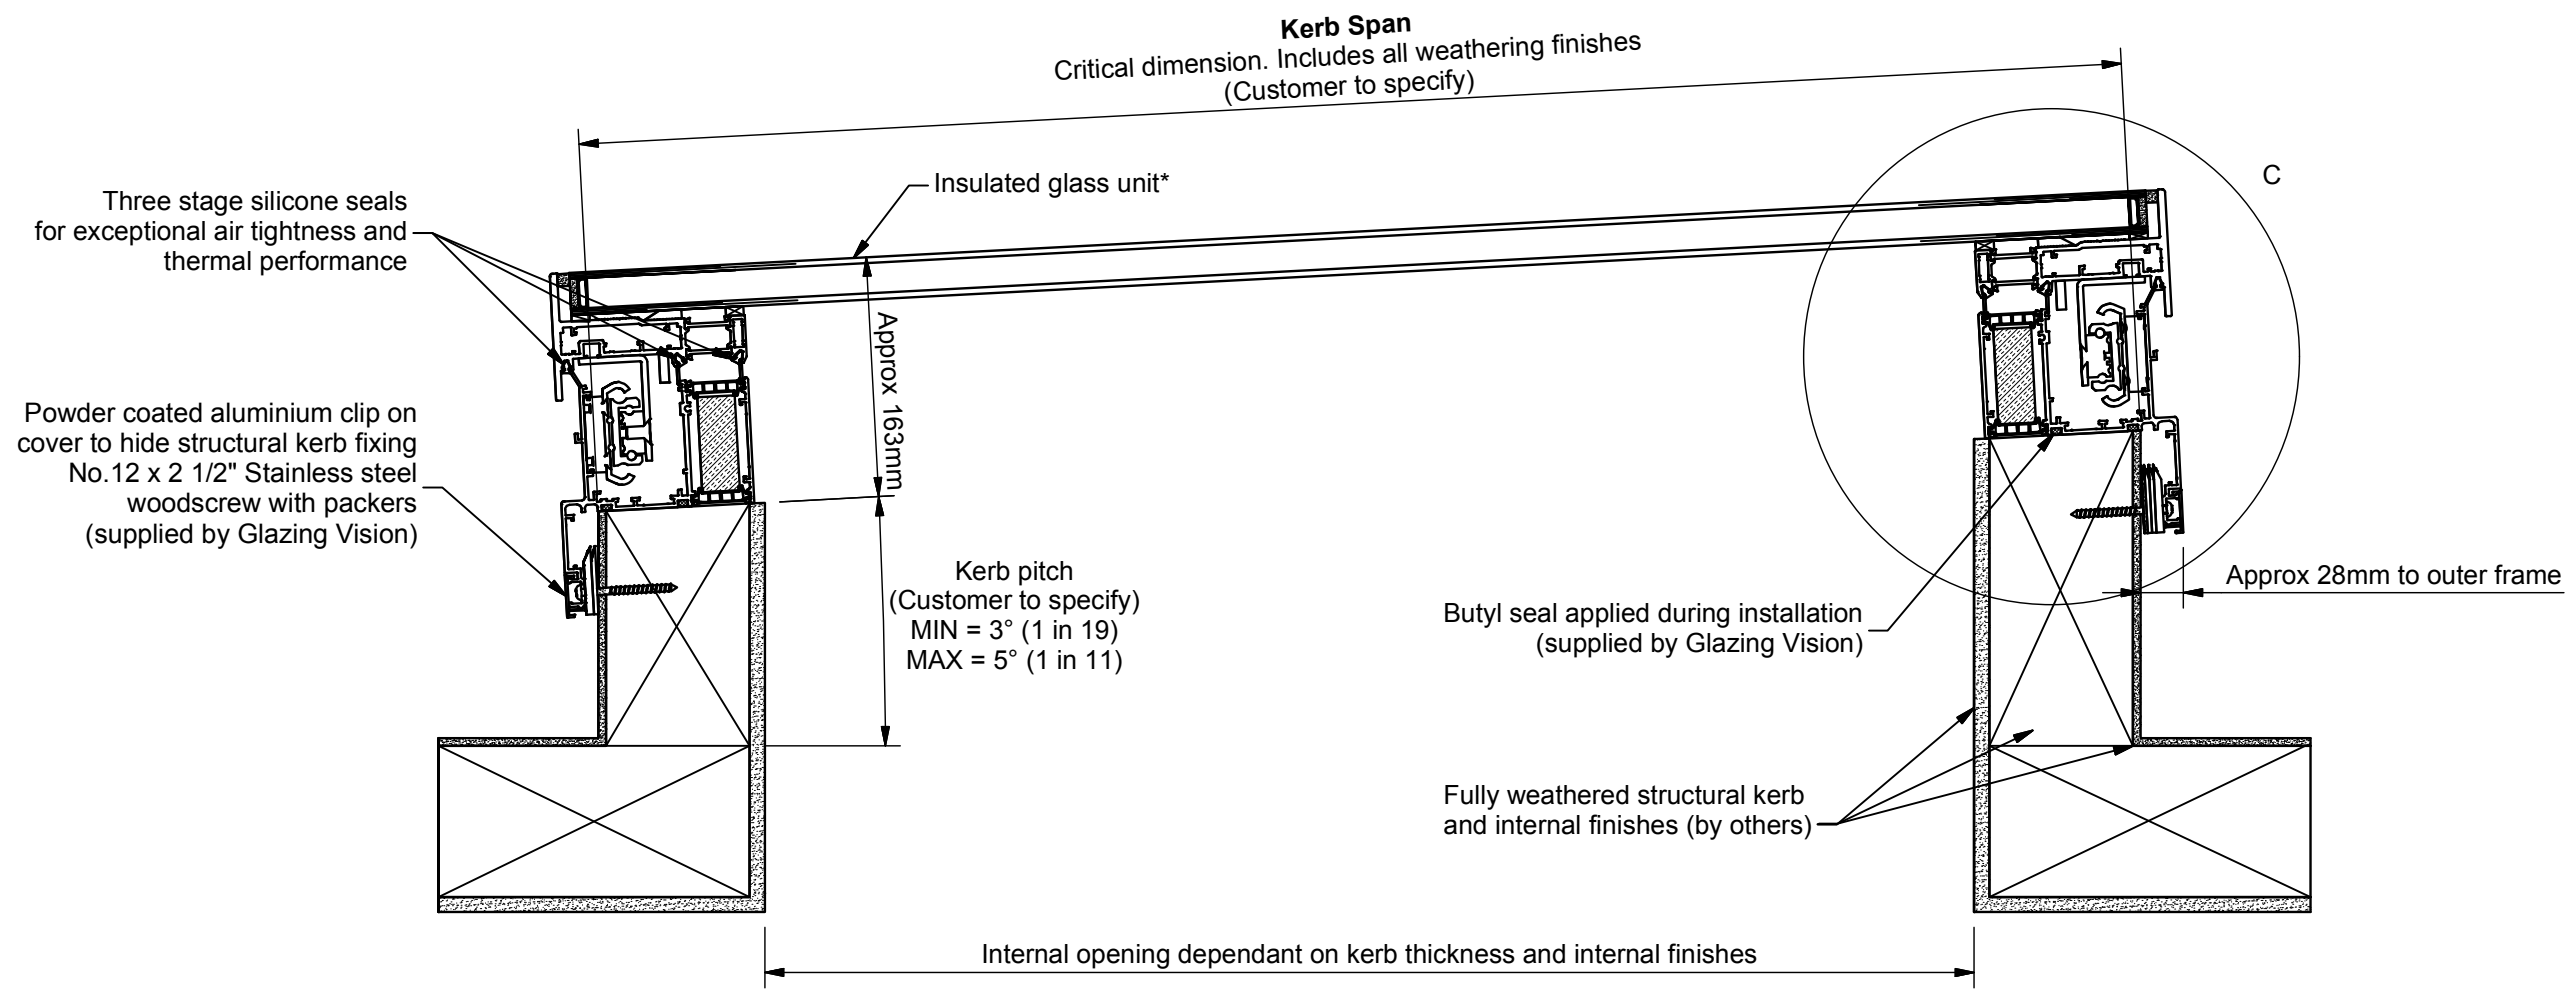

*Standard double glazed unit comprises:
 6mm Clear HST toughened soft coat low-E outer
 16mm Warm edge argon filled silicone sealed spacer
 9.5mm Clear heat-strengthened laminated inner
 Triple glazed option available on some sizes

Standard colour:
 RAL7015 Slate grey outer
 RAL9010 Pure white inner

<p>Saw Mills Road Diss Norfolk IP22 4RG</p> <p>Tel: +44 (0)333 8000 881 Fax: +44 (0)333 8000 882 Email: sales@glazingvision.co.uk Website: www.glazingvision.co.uk</p>	<p>IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.</p>	<p>Third angle projection unless otherwise noted. Tolerances: Whole numbers = ±1mm One decimal place = ±0.5mm Two decimal places = ±0.2mm All angles 90±0.5 degrees unless specified IF IN DOUBT - ASK! DO NOT SCALE Supplier to deburr & remove sharp corners</p>	<p>Rev</p>	<p>Revision Description</p>	<p>Drawn/ Date</p>	<p>Product: 601 - GV Standard Flat Skyglide Description: Section B-B (Along the fall)</p>	<p>Checked By: HL</p>
			<p>-</p>	<p>Initial release</p>	<p>JWL 13.02.14</p>	<p>Materials: N/A Finish: N/A</p>	<p>Check Date: 11.08.17</p>
			<p>A</p>	<p>Max pitch from 10deg (1in5) to 5deg (1in11). Standard glass from 4-20-4 low-E tough-tough to 6-16-9.5 low-E tough-HS lam.</p>	<p>JSL 11.08.17</p>	<p>Weight: N/A Quantity: N/A Scale: 1:5 1:25</p>	<p>Drawn By: JWL Drawn Date: 13.02.14 Drawing No: 601-ASS-404</p>
			<p>PERMISSION OF GLAZING VISION LTD.</p>				