



Detail C (Scale 1:2)
Section through top of fall

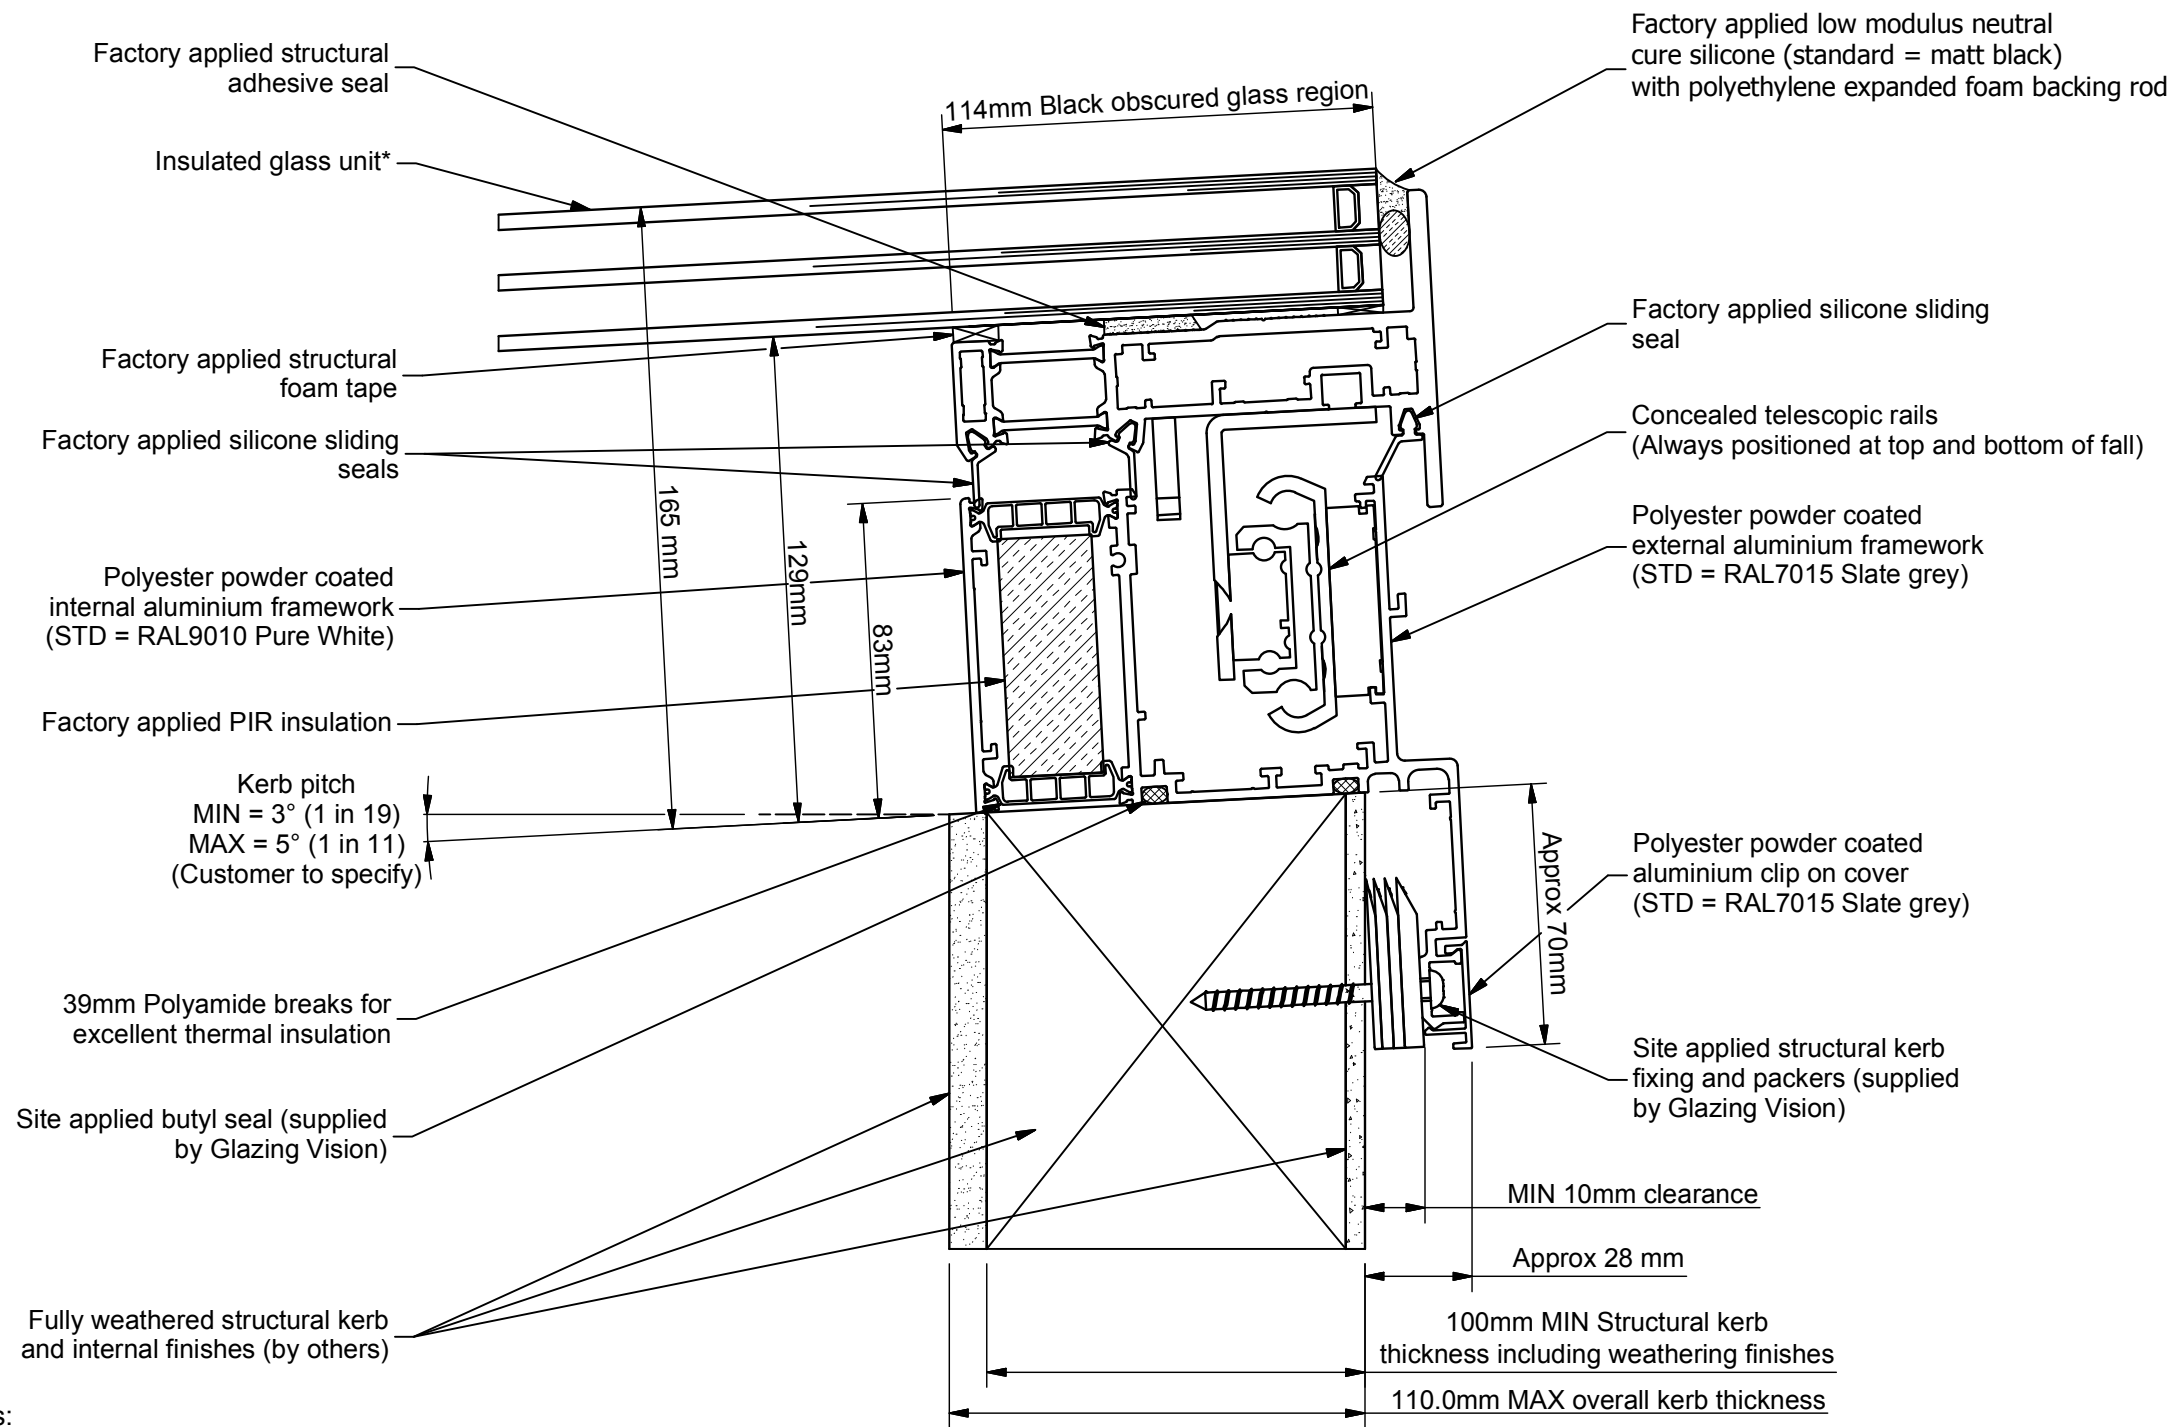

*Standard triple glazed unit comprises:
 4mm Clear HST toughened outer
 12mm Warm edge argon filled silicone sealed spacer
 4mm Clear HST soft coat low E toughened mid pane
 12mm Warm edge argon filled silicone sealed spacer
 4mm Clear HST soft coat low E toughened inner
 Double glazed option available

Standard colour:
 RAL7015 Slate grey outer
 RAL9010 Pure white inner

 Saw Mills Road Diss Norfolk IP22 4RG Tel: +44 (0)333 8000 881 Fax: +44 (0)333 8000 882 Email: sales@glazingvision.co.uk Website: www.glazingvision.co.uk	IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.	Third angle projection unless otherwise noted. Tolerances: Whole numbers = ±1mm One decimal place = ±0.5mm Two decimal places = ±0.2mm All angles 90±0.5 degrees unless specified IF IN DOUBT - ASK! DO NOT SCALE Supplier to deburr & remove sharp corners	Rev - Initial release	Revision Description Initial release	Drawn/ Date JWJ 17.03.14	Product: 601 - GV Standard Flat Skyglide Description: Detail C (section along the fall triple glaze)	Checked By: HL
			A Max pitch from 10deg (1in5) to 5deg (1in11).	JWJ 17.03.14	Drawn By: JWJ Drawn Date: 17.03.14	Check Date: 11.08.17	
			JSL 11.08.17	Weight: N/A Quantity: N/A Scale: 1:2	Drawing No: 601-ASS-410		