


Mounting bracket polyester powder coated to match external product colour.

Cable enters product behind the mounting bracket into a weather tight cable gland.

Plan View of PitchVent
Position 1 shown

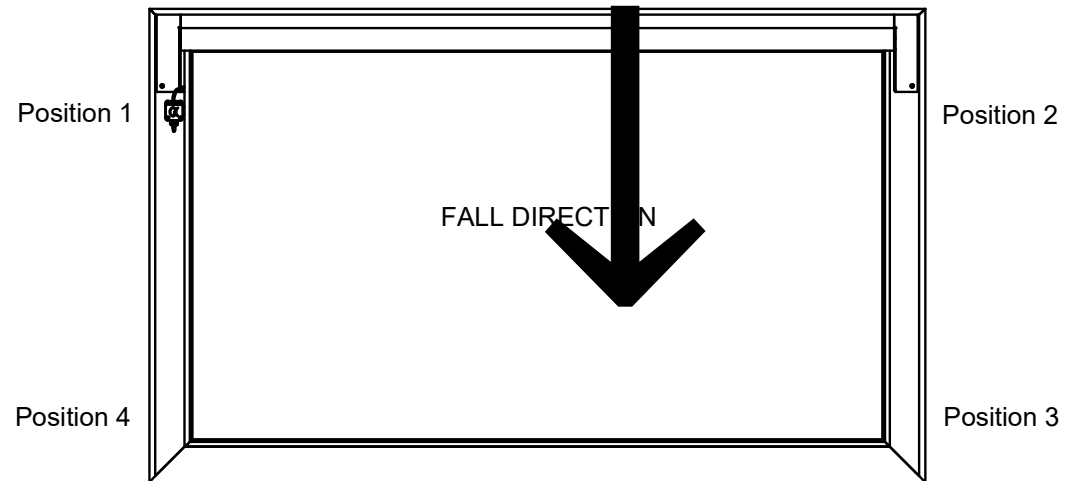


Note: When a rain sensor is required, the customer is to specify a mounting position at time of order to maximise exposure to the elements and avoid being in the rain shadow of the building.

There are four positions for the rain sensor, and it cannot be mounted remotely.

For rain sensors at position 3 and 4, there will be a black cable running towards the hinge along the underside of the lid.

NOTE: The rain sensor is an optional extra and must be specified if required.

 <p>Saw Mills Road Diss Norfolk IP22 4RG</p> <p>Tel: +44 (0)333 8000 881 Fax: +44 (0)333 8000 882 Email: sales@glazingvision.co.uk Website: www.glazingvision.co.uk</p>	<p>IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.</p>	<p>Third angle projection unless otherwise noted. Tolerances: Whole numbers = ±1mm One decimal place = ±0.5mm Two decimal places = ±0.2mm All angles 90±0.5 degrees unless specified IF IN DOUBT - ASK! DO NOT SCALE Supplier to deburr & remove sharp corners</p>	Rev	Revision Description	Drawn/Date	Product: 202 - PitchVent		Checked By: JSL
			-	Initial Release	HL 02.02.18	Description: PitchVent Rain Sensor Positioning		
			A	Change in wording about remote mounting	HL 13.04.18	Materials: N/A	Drawn By: HL	Drawing No: 202-ASS-008
						Finish: N/A	Drawn Date: 02.02.18	
						Weight: N/A		
			Quantity: N/A					
			Scale: N/A					