


### GV Standard PitchVent Small Frame

Used for glass between 26mm & 34.8mm thickness  
(typically used for double glazed units)

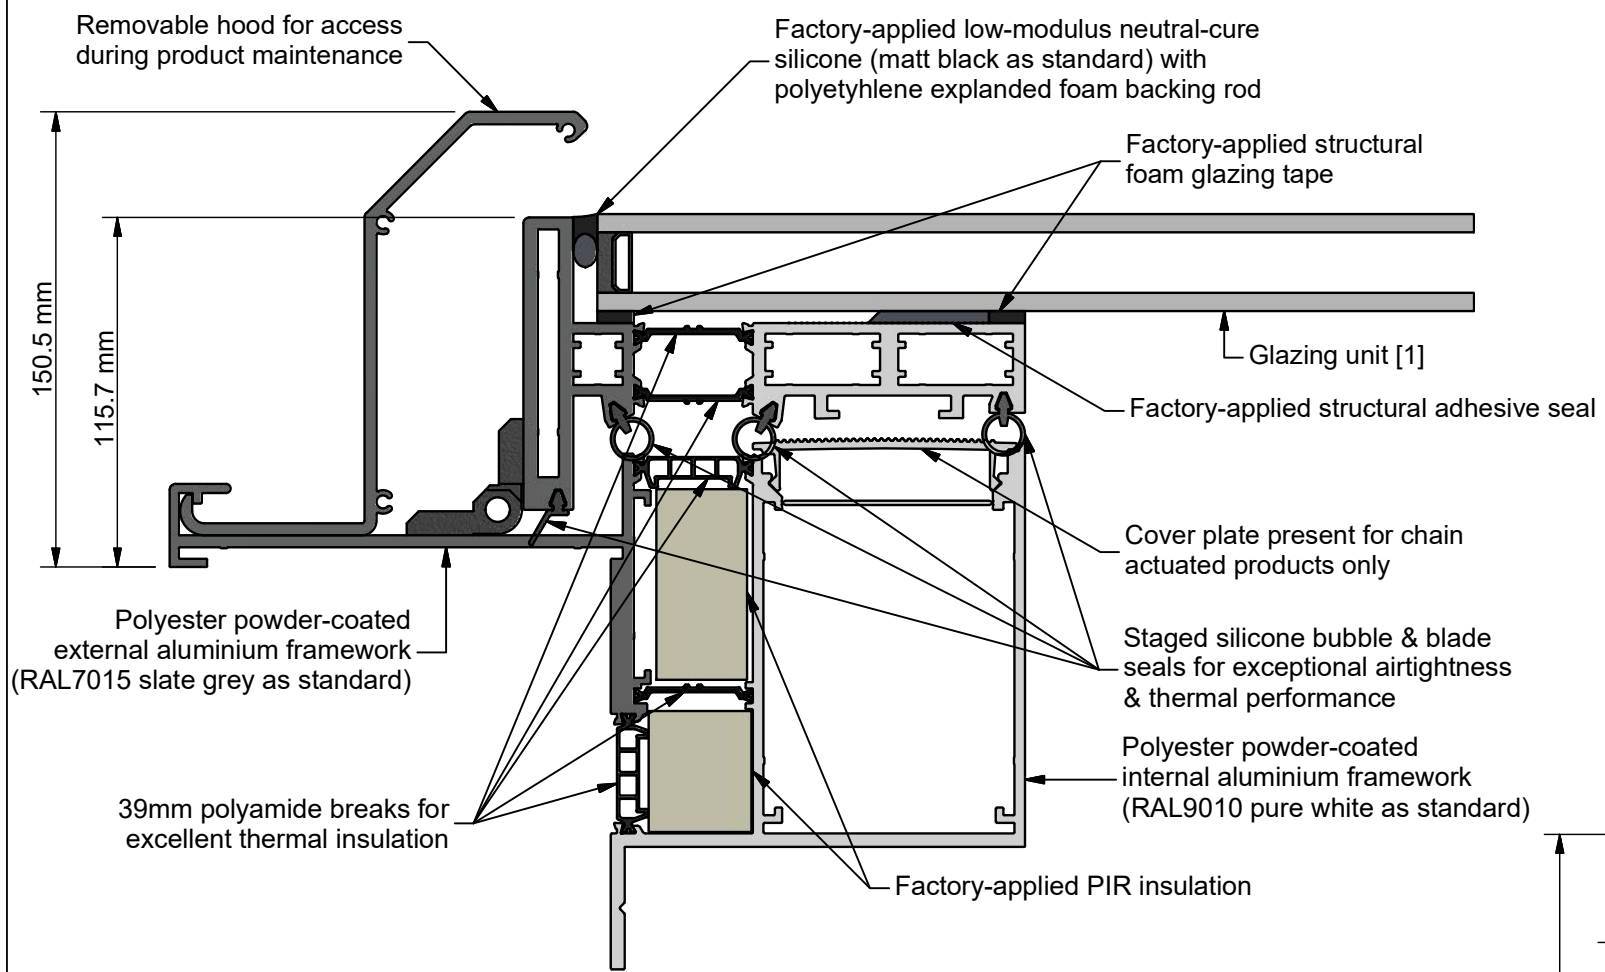

[1] Example glazing unit: Toughened double glazed unit  
 - 6mm HST toughened outer pane  
 - 20mm argon-filled cavity, black warm edge spacer  
 - 6mm HST toughened soft coat low-E inner pane

[2] Example glazing unit: Toughened triple glazed unit  
 - 6mm HST toughened outer pane  
 - 16mm argon-filled cavity, black warm edge spacer  
 - 6mm HST toughened soft coat low-E mid pane  
 - 16mm argon-filled cavity, black warm edge spacer  
 - 6mm HST toughened soft coat low-E inner pane


### For Both Frames

For general dimensions, see GV drawing 202-ASS-001

For installation information, see GV drawings 202-ASS-002, 202-ASS-003, 202-ASS-004

### GV Standard PitchVent Large Frame

Used for glass between 44mm & 52.8mm thickness  
(typically used for triple glazed units)

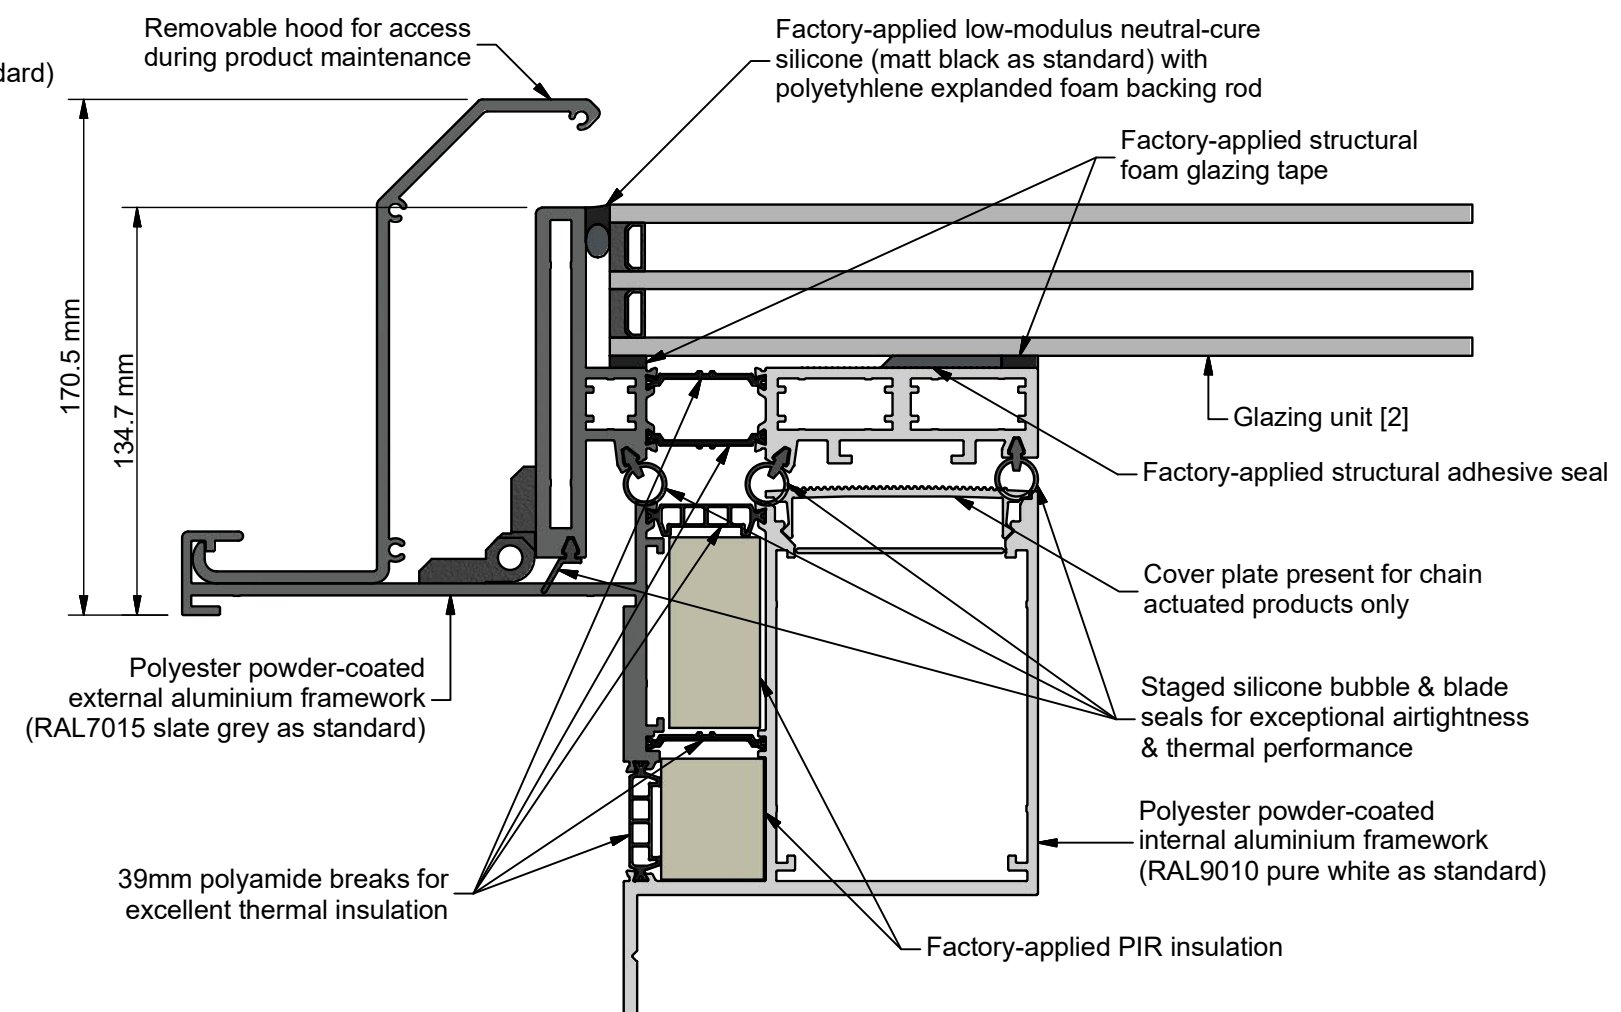

Rev	Revision Description	Drawn/Date
-	Initial Release	HL 02.02.18

<b>Product:</b> 202 - PitchVent		<b>Checked By:</b> JSL
<b>Description:</b> PitchVent Section Views		
<b>Materials:</b> N/A	<b>Drawn By:</b> HL	<b>Check Date:</b> 02.02.18
<b>Finish:</b> N/A	<b>Drawn Date:</b> 02.02.18	
<b>Weight:</b> N/A	<b>Quantity:</b> N/A	
<b>Scale:</b> N/A	<b>Drawing No:</b> 202-ASS-005	