


Mounting bracket polyester powder coated to match external product colour.

Cable enters product behind the mounting bracket into a weather tight cable gland.

**Plan View of PitchVent**  
Position 1 shown

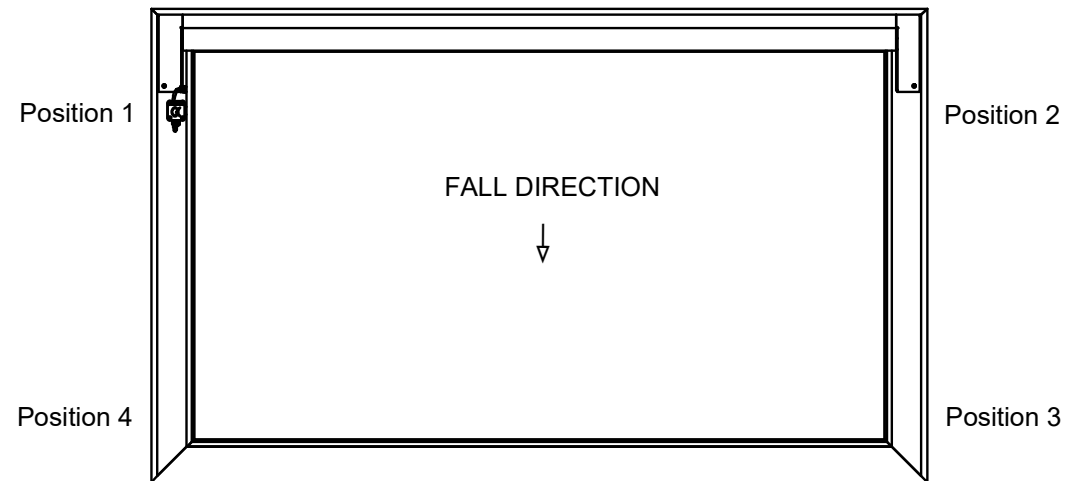

Note: When a rain sensor is required, the customer is to specify a mounting position at time of order to maximise exposure to the elements and avoid being in the rain shadow of the building.

There are four positions for the rain sensor, and it cannot be mounted remotely.

**NOTE: The rain sensor is an optional extra and must be specified if required.**



Saw Mills Road  
Diss  
Norfolk  
IP22 4RG  
Tel: +44 (0)333 8000 881  
Fax: +44 (0)333 8000 882  
Email: sales@glazingvision.co.uk  
Website: www.glazingvision.co.uk

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.

Third angle projection unless otherwise noted.  
Tolerances:  
Whole numbers = ±1mm  
One decimal place = ±0.5mm  
Two decimal places = ±0.2mm  
All angles 90±0.5 degrees unless specified  
**IF IN DOUBT - ASK! DO NOT SCALE**  
**Supplier to deburr & remove sharp corners**

Rev	Revision Description	Drawn/Date	Product: 202 - PitchVent	Checked By:
B	Updated note, text referring to rain sensor at position 3 and 4 have been removed.	HTT 10.06.20	Description: PitchVent Rain Sensor Positioning	HL
A	Change in wording about remote mounting	HL 13.04.18	Materials: N/A	Check Date: 10.06.20
			Finish: N/A	
			Weight: N/A	Drawn By: HL
			Quantity: N/A	Drawn Date: 02.02.18
			Scale: N/A	Drawing No: 202-ASS-008