


## Section A-A

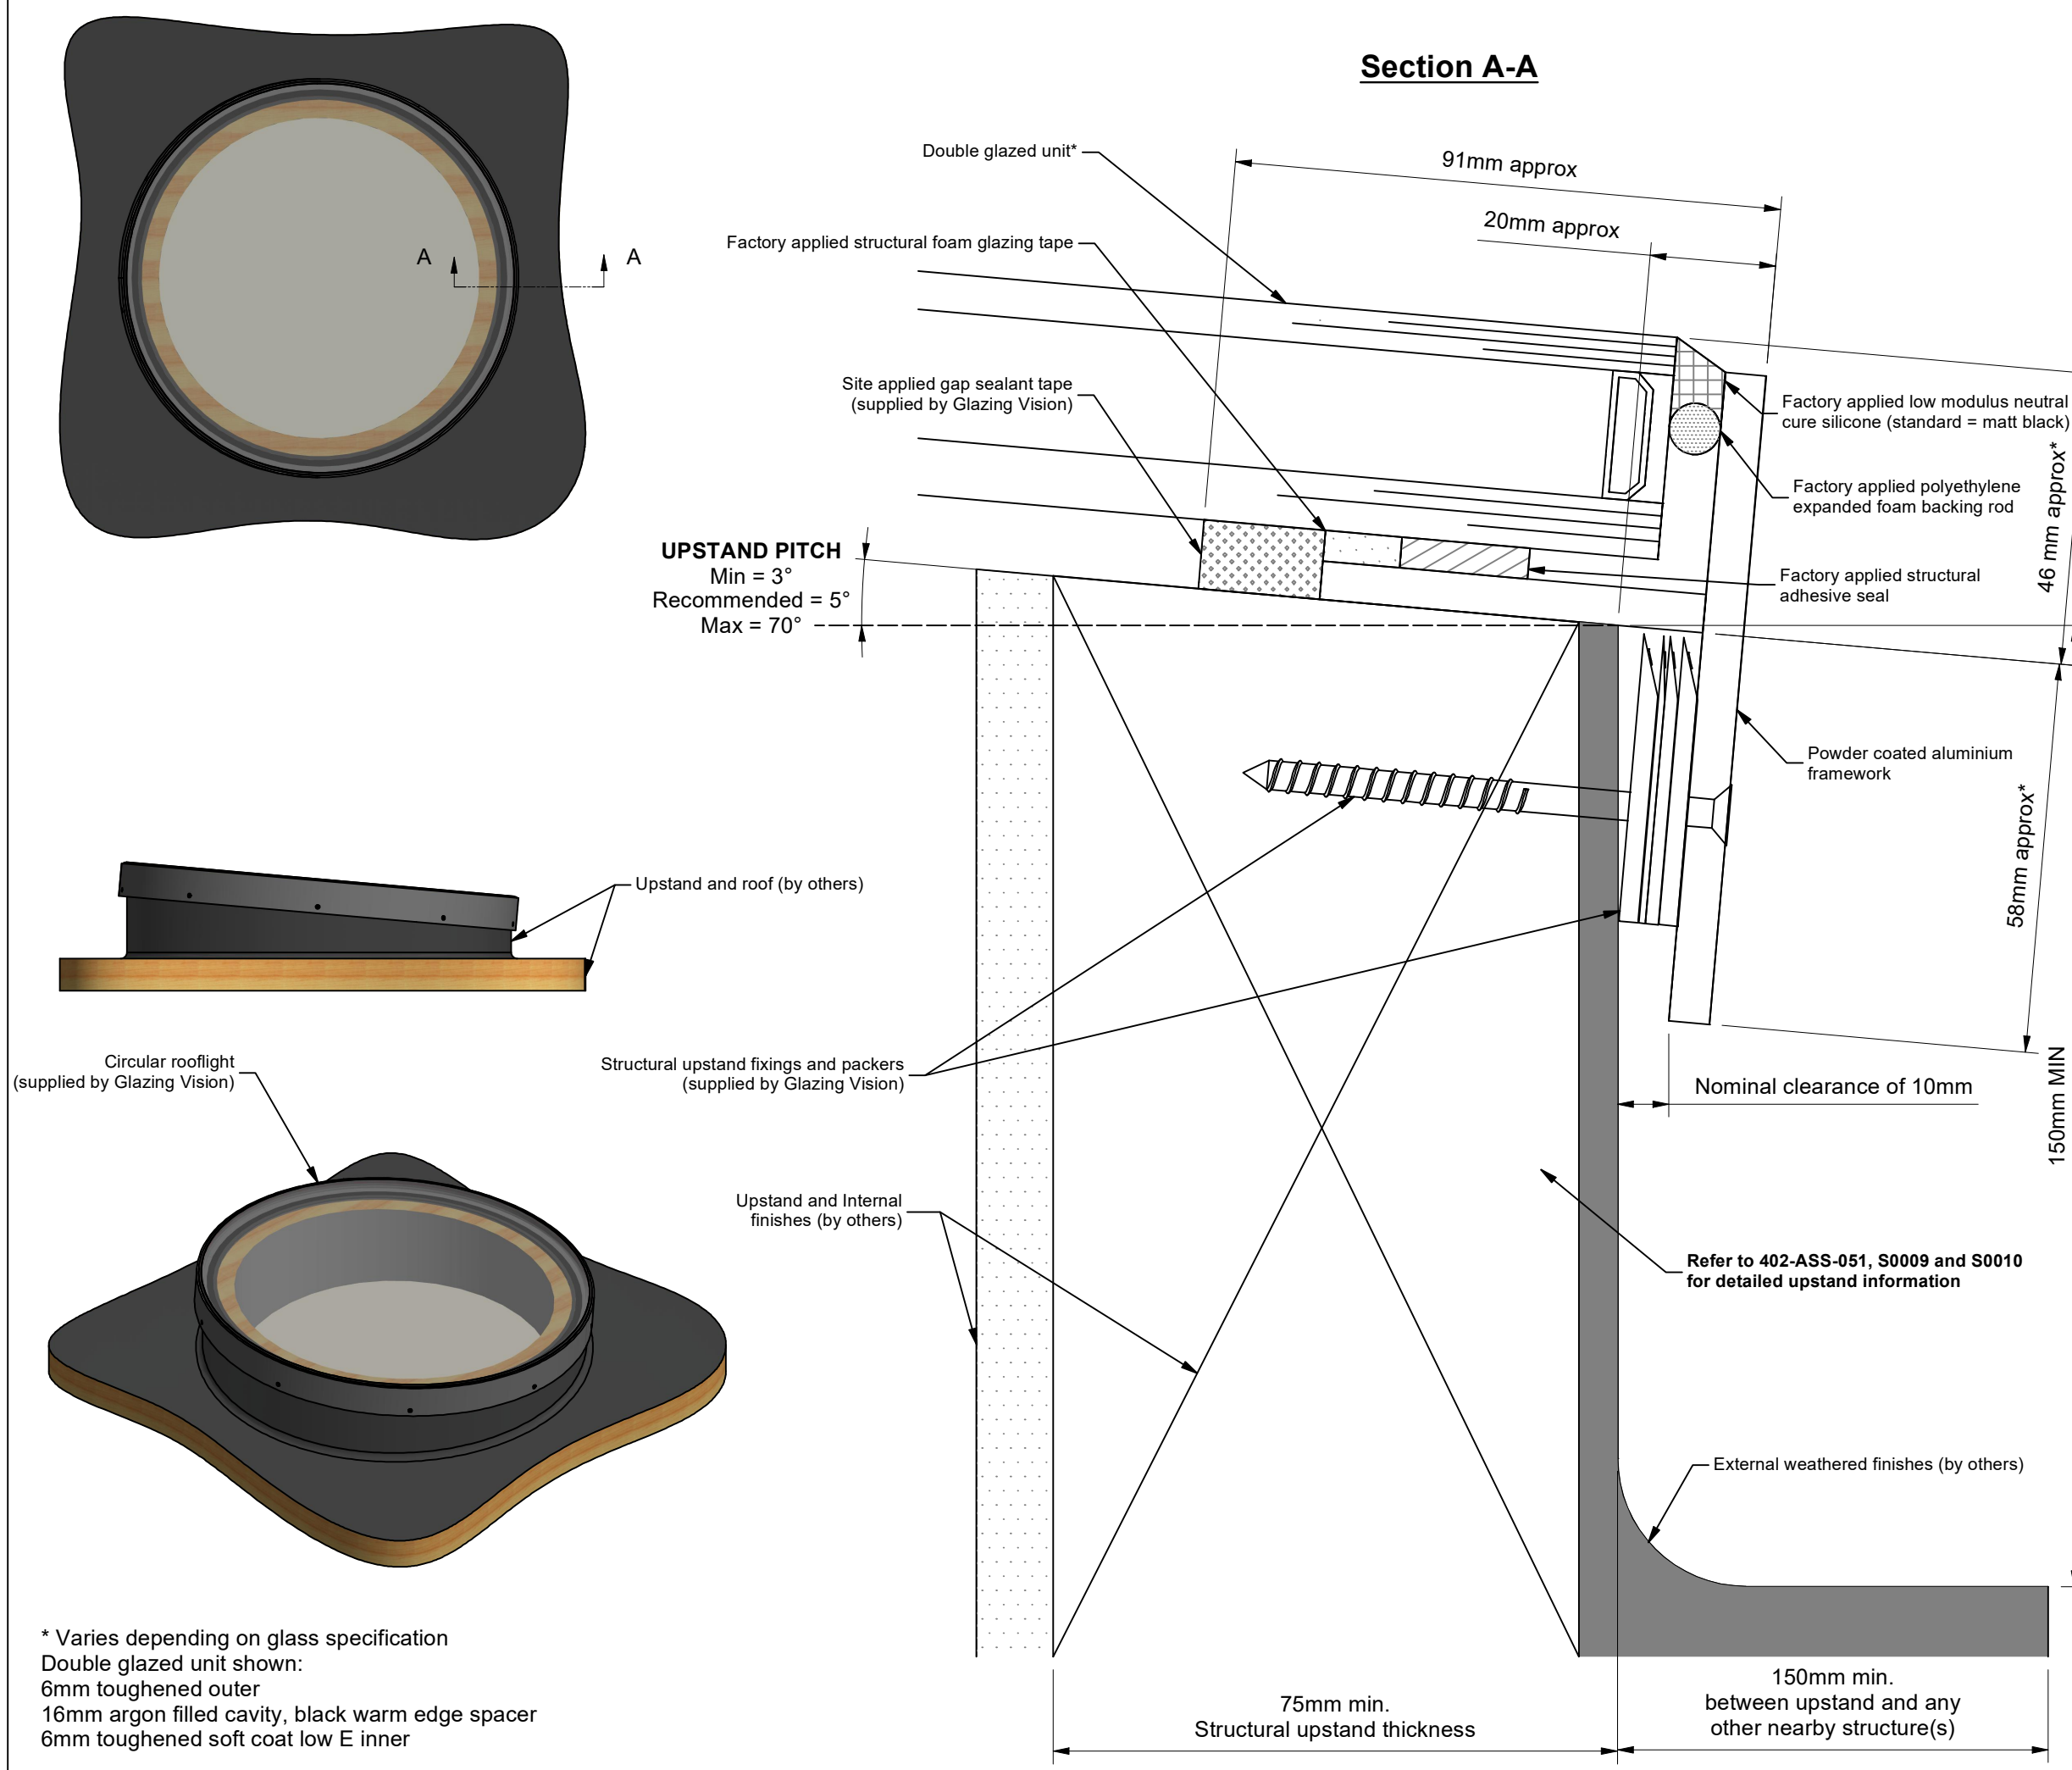

\* Varies depending on glass specification  
 Double glazed unit shown:  
 6mm toughened outer  
 16mm argon filled cavity, black warm edge spacer  
 6mm toughened soft coat low E inner

ESTIMATED WEIGHT	SCALE
------------------	-------

(UNLESS OTHERWISE STATED)

REVISION	DESCRIPTION	NAME/DATE
-	Initial Release (Supersedes 402-ASS-052)	SS 18/Jan/2024

PROJECT 402 - GV Standard Flushglaze	
TITLE / DESCRIPTION Circular Double-glaze Flushglaze upstand detail	CHECKED BY
DRAWING NO. 402-SDD-UK-052	SHEET 1 OF 1