


## Section B-B (Scale 1:5)

(Along fall)

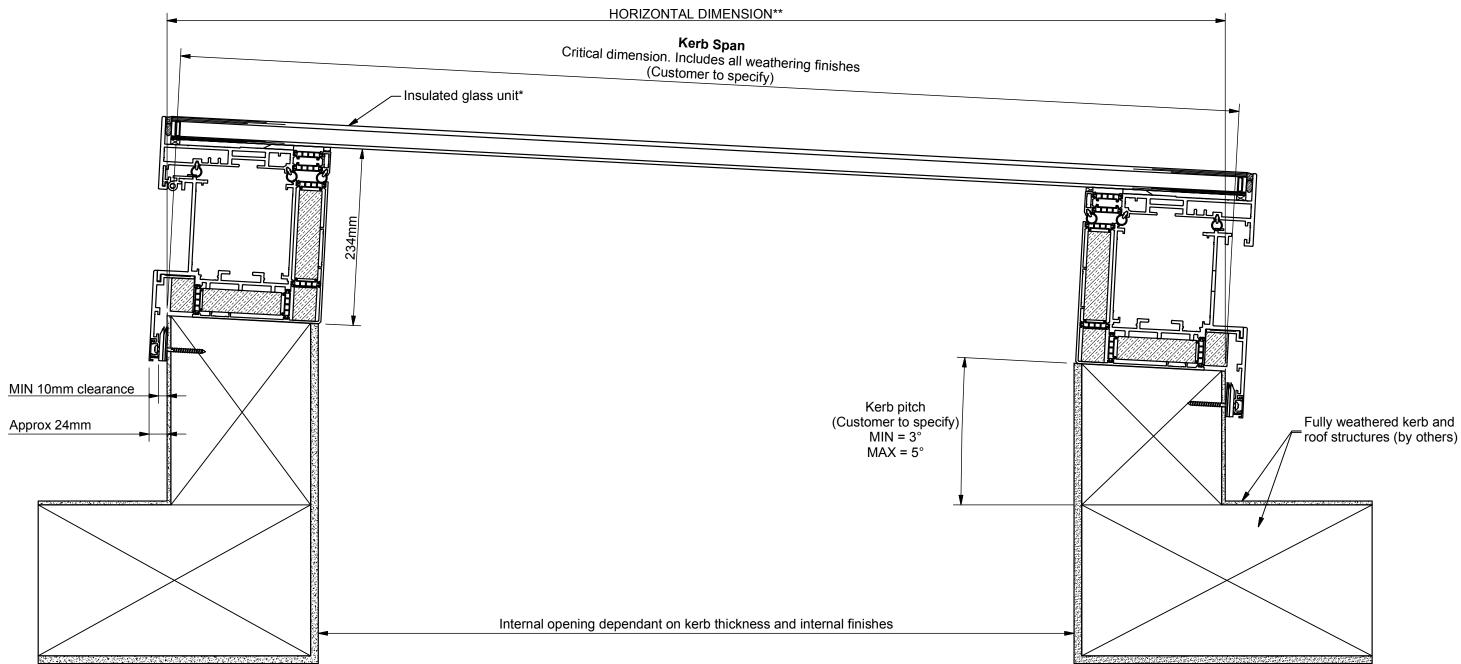

\*Standard double glazed unit comprises: 6mm Clear HST toughened outer 20mm Warm edge argon filled silicone sealed spacer 4mm Clear HST soft coat low E toughened inner

\*\* Dimension calculated as: SPAN x COSINE(PITCH°) e.g. 2000cos(3) = 1997



IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST Tel: +44 (0)333 8000 881 NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY FAX: +44 (0)333 8000 882 Fax: +44 (0)333 8000 882
Email: sales@glazingvision.co.uk
Website: www.glazingvision.co.uk
PERMISSION OF GLAZING VISION LTD.

	All angles 90±0.5 degrees unless specified  I FIN DOUBT - ASK! DO NOT SCALE  Supplier to deburr & remove sharp corners				
٧	IF IN DOUBT - ASK! DO NOT SCALE				
	All angles 90±0.5 degrees unless specified				
-	Two decimal places = ±0.2mm				
Ε	One decimal place = ±0.5mm				
	Whole numbers = ±1mm				
	Tolerances:				
	Third angle projection unless otherwise noted.				

Revision Description	Drawn/ Date	JWL Description: General arrangement details		Checked By:
itial release				PGW
	12.02.14			Check Date:
		Finish: N/A	Drawn By: JWL	12.02.14
		Weight: N/A	Drawn Date: 12.02.14	12.02.14
		Quantity: N/A	Drawing No: 405-ASS-4	110