
Detail H (Scale 1:2)

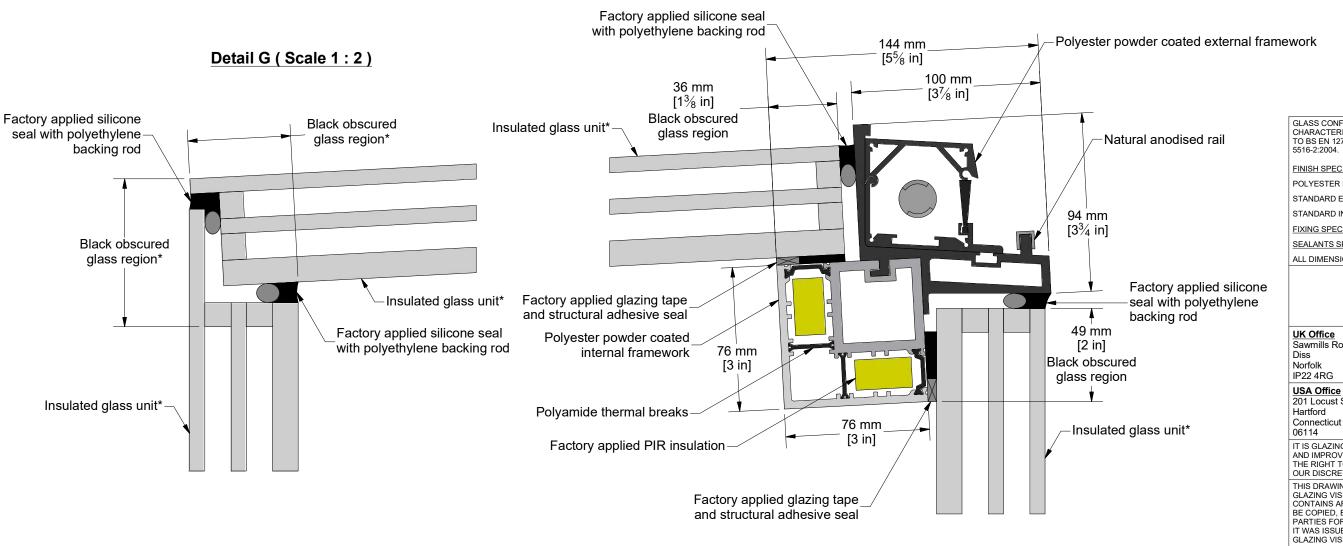

GLASS CONFORMS TO IMPACT RESISTANCE AND BREAKAGE CHARACTERISTICS OF BS EN 12600:2002. IGUS FABRICATED TO BS EN 1279 AND SUPPLIED IN ACCORDANCE WITH BS

FINISH SPECIFICATION:

POLYESTER POWDER COATED: MIN 40 MICRONS

STANDARD EXTERNAL COLOUR: RAL 7015 Slate Grey

STANDARD INTERNAL COLOUR: RAL 9010 Pure White

FIXING SPECIFICATION: A2 STAINLESS STEEL

SEALANTS SPECIFICATION: NEUTRAL CURE TO BS5889

ALL DIMENSIONS mm [in] UNLESS OTHERWISE STATED.

GLAZING VISION

Sawmills Road

Tel: +44 (0)1379 658300 Email: sales@glazingvision.co.uk Norfolk Website: www.glazingvision.co.uk

USA Office

201 Locust Street Tel: +1 860 206 8111 Email: sales@glazingvision.com

Website: www.glazingvision.com

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE.

THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS / INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.

REV.	REVISION DESCRIPTION		NAME/DATE
-	Initial release		HL 08.07.19
CHECKED JSL 08.07.19 SCA		LE NTS	
	OV Ct	a .b a	_

PRODUCT GV Standard Free Standing Skybox

DESCRIPTION

Detail G and Detail H

DRAWING NUMBER SHEET 700-ASS-012 1 of 1

*Varies dependent on glass specification

Triple glazed unit shown, but a double glazed option is also available.

Check your quote/order confirmation for specific information on what's been specified in your product.