


Plan view of VisionVent
Position 1 shown

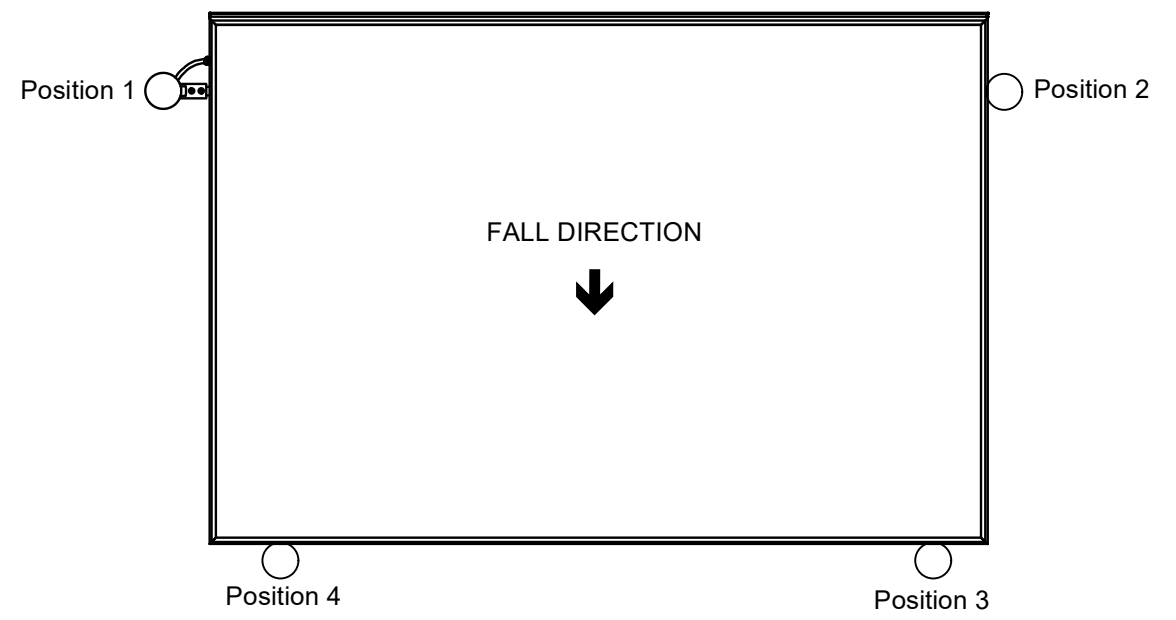

When a rain sensor is required the customer is to specify a mounting position at time of order to maximise exposure to the elements and avoid being in the rain shadow of the building.

There are five positions for the rain sensor. Either rooflight mounted (positions 1-4) or externally mounted with flying lead (position 5). Position 5 requires the rain sensor to be mounted on a nearby structure. The cable will exit the rooflight at position 2 for mounting remotely.

NOTE: The rain sensor is an optional extra and must be specified if required

<p>Saw Mills Road Diss Norfolk IP22 4RG</p> <p>Tel: +44 (0)333 8000 881 Fax: +44 (0)333 8000 882 Email: sales@glazingvision.co.uk Website: www.glazingvision.co.uk</p>	<p>IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.</p>	<p>Third angle projection unless otherwise noted. Tolerances: Whole numbers = ±1mm One decimal place = ±0.5mm Two decimal places = ±0.2mm All angles 90±0.5 degrees unless specified IF IN DOUBT - ASK! DO NOT SCALE Supplier to deburr & remove sharp corners</p>	<p>Rev</p>	<p>Revision Description</p>	<p>Drawn/Date</p>	<p>Product: 401 - GV Standard VisionVent Description: VisionVent solo electric</p>	<p>Checked By: JSL</p>
			<p>A</p>	<p>Rain sensor Positions 3 & 4 re-positioned</p>	<p>SW 17.03.17</p>	<p>Materials: N/A Finish: N/A</p>	<p>Check Date: 29/Sep/2023</p>
			<p>B</p>	<p>Updated the Rain Sensor to Optical Rain Sensor.</p>	<p>VA 26/Sep/2023</p>	<p>Weight: N/A Quantity: N/A Scale: N/A</p>	<p>Drawn By: JamesB Drawn Date: 09.12.13</p>
							<p>Drawing No: 401-ASS-402</p>