

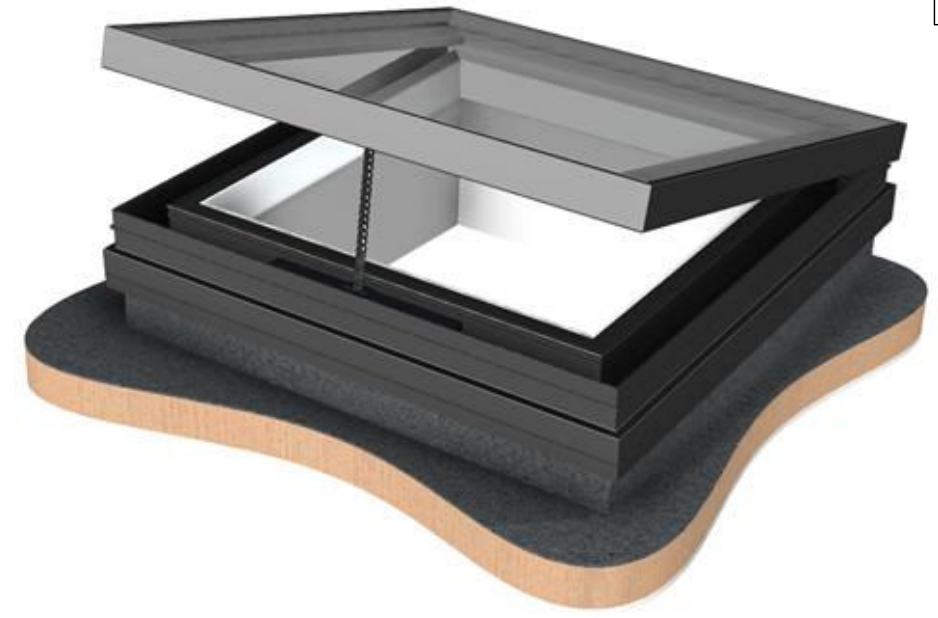


**Section through opening end  
( Scale 1 : 2 )**

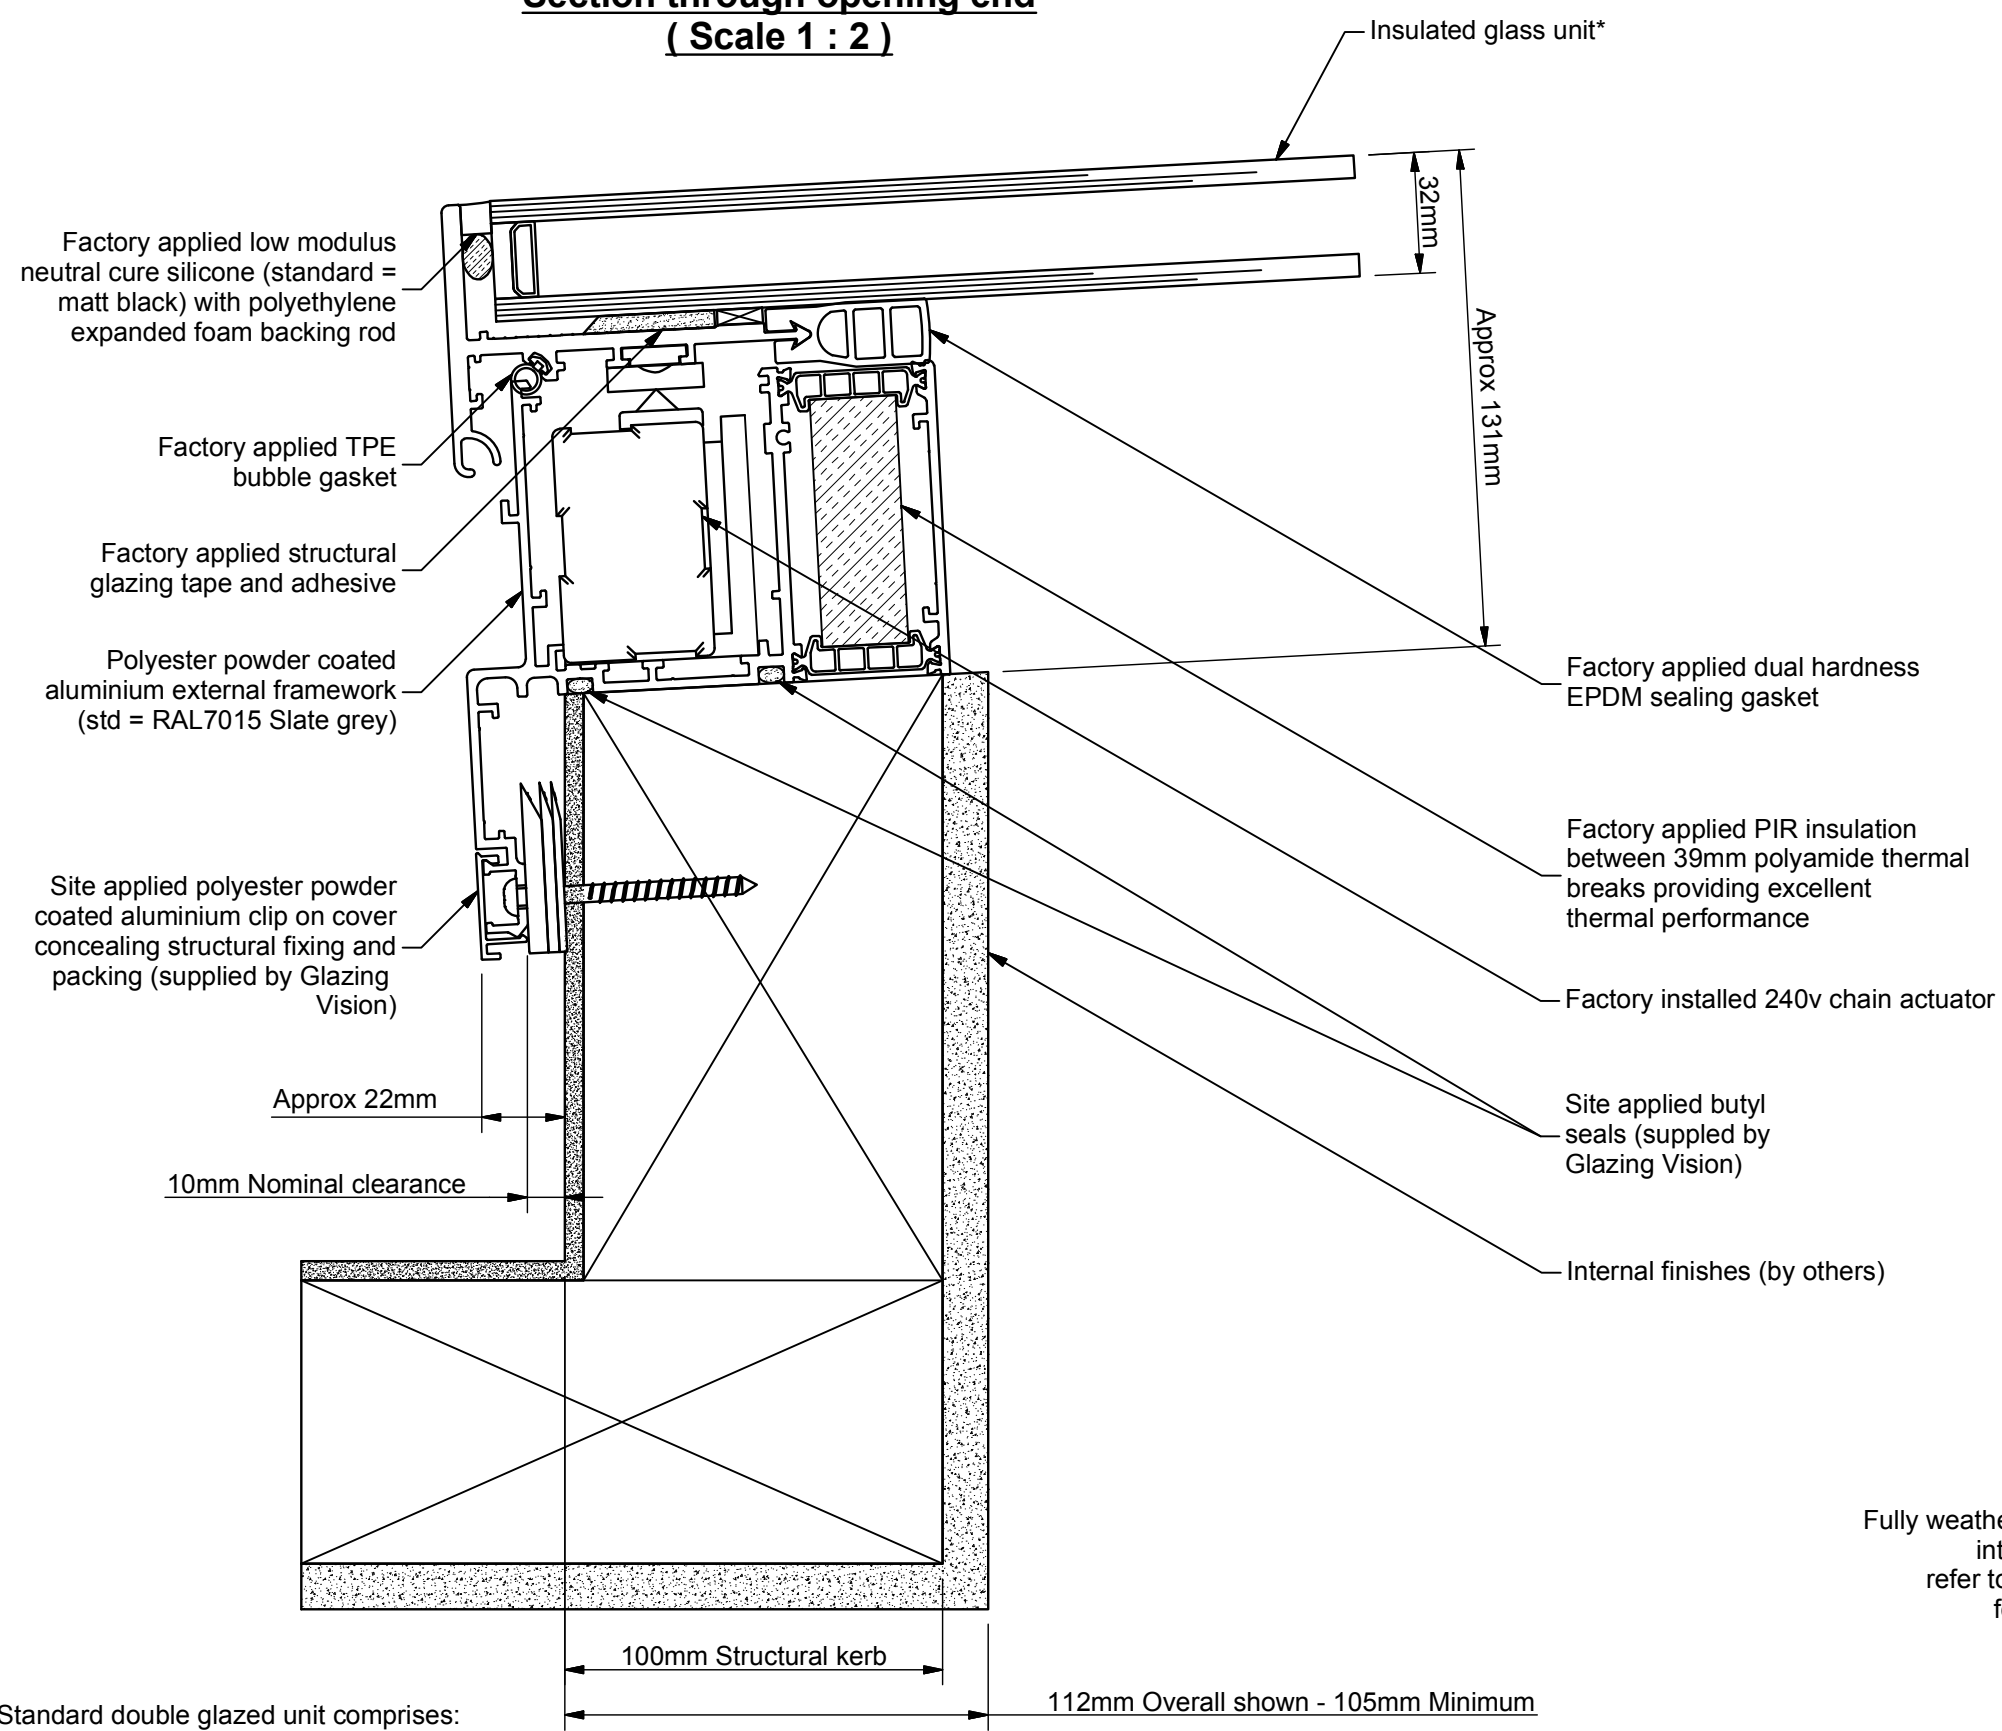

**Section through opening end  
open position ( Scale 1 : 5 )**

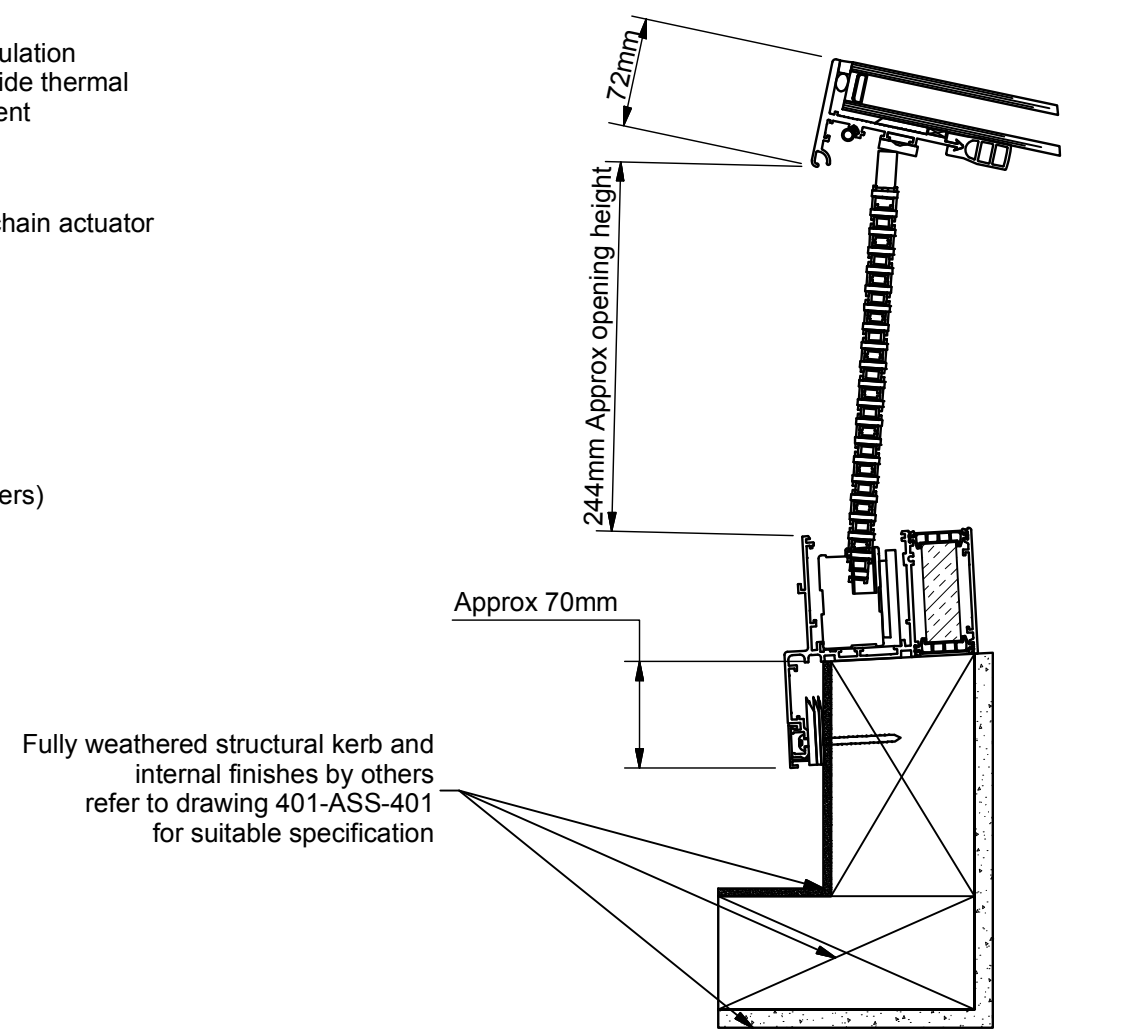

\*Standard double glazed unit comprises:  
6mm HST Clear toughened outer  
20mm Argon filled black silicone sealed cavity with warm edge spacer  
6mm HST Clear toughened soft coat low E

Design Patented: GB2514119

<p>Saw Mills Road Diss Norfolk IP22 4RG</p> <p>Tel: +44 (0)333 8000 881 Fax: +44 (0)333 8000 882 Email: sales@glazingvision.co.uk Website: www.glazingvision.co.uk</p>	IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE. THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS/INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.		Third angle projection unless otherwise noted. Tolerances: Whole numbers = ±1mm One decimal place = ±0.5mm Two decimal places = ±0.2mm All angles 90±0.5 degrees unless specified <b>IF IN DOUBT - ASK! DO NOT SCALE</b> Supplier to deburr & remove sharp corners	<b>Rev</b> B A	<b>Revision Description</b> Patent no. added Amended butyl and site fixing leaders	<b>Drawn/Date</b> JSL 10.10.16 JamesB 24.06.14	<b>Product:</b> 401 - GV Standard VisionVent <b>Description:</b> Chain actuated vent <b>Materials:</b> N/A <b>Finish:</b> Std=RAL7015 / RAL9010 <b>Weight:</b> N/A <b>Quantity:</b> N/A <b>Scale:</b> As above	<b>Checked By:</b> JWL <b>Check Date:</b> 10.10.16 <b>Drawing No:</b> 401-ASS-413
--	---	--	---	----------------------	--	--	--	---