



**Section A-A**  
(Closed position)

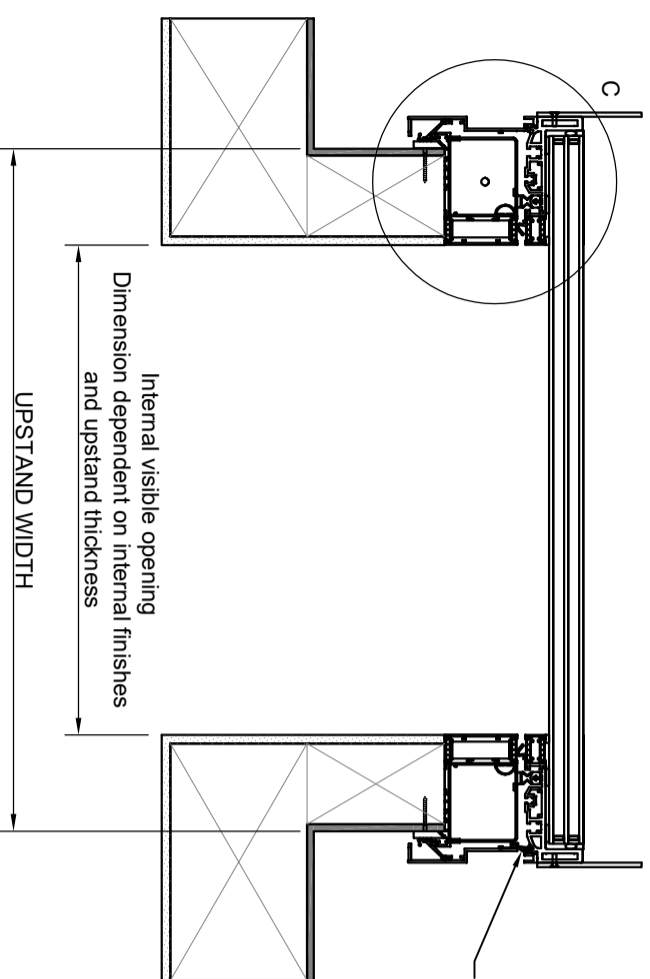

**Plan view showing open and closed positions**

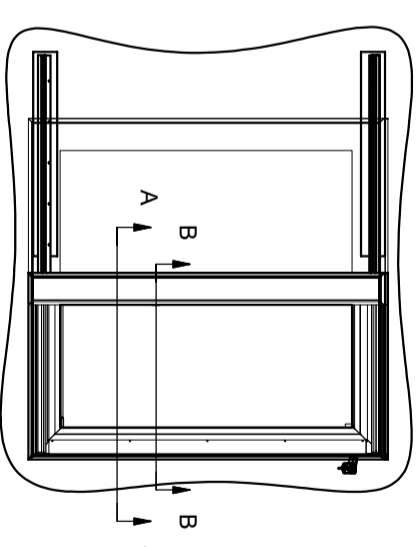

Silicone seals with non-friction coating (black)

Insulated glazed unit\*

Polyester powder coated aluminium fin (omitted on small units)

Factory applied low modulus neutral cure silicone (standard = matt black) with polyethylene expanded foam backing rod

Polyester powder coated aluminium external framework (standard = RAL7015 slate grey)

Polyester powder coated aluminium internal framework (standard = RAL9010 pure white)

Cable trunking (black)

Polyamide thermal breaks (Black) with factory applied PIR insulation

Site applied silicone seal (supplied by Glazing Vision)


Control cover flashing with rubber edging strip

Brush seal

Site applied structural upstand fixings and spacers (supplied by Glazing Vision)

Fully weathered structural upstand and internal finishes (by others)

**Section B-B**  
(Open position)

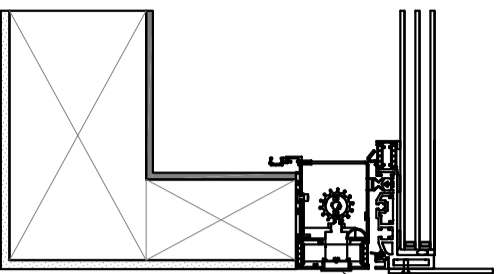

Removable plug (white) for access to motor override allows unit to be manually opened in an emergency e.g. if mains supply is disconnected and batteries run flat.



Third angle projection unless otherwise stated

THIS IS A STANDARD DRAWING. THE UNIT PURCHASED MAY VARY. THIS DRAWING DOES NOT INDICATE ACCURATE DIMENSIONS FOR ANY EXISTING STRUCTURAL COMPONENTS OR PRODUCTS.  
DO NOT USE THIS DRAWING FOR ANY SITE LAYOUTS. ON-SITE PERSONNEL ARE RESPONSIBLE TO CONFIRM DRAWINGS VS SPECIFIC SITE CONDITIONS.

☎: +44 (0)1379 658300  
🌐: [www.glazingvision.co.uk](http://www.glazingvision.co.uk)  
✉: [sales@glazingvision.co.uk](mailto:sales@glazingvision.co.uk)

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE.

THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS / INFORMATION CONTAINED HEREIN ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED

UPSTAND TO BE CONSTRUCTED TO WITHIN ±10 mm ON STRAIGHT & ±12 mm ON DIAGONAL. DESIGNED SIZES. WEATHERING BY OTHERS.

ESTIMATED WEIGHT	SCALE	Not to scale
N/A		
REVISION	DESCRIPTION	NAME/DATE
-	Initial Release	JSL 26 May 2022
A	Fin updated to cover all standard sizes	RJ 29 Jun 2022

PROJECT		CHECKED
Sliding Over Roof		
TITLE / DESCRIPTION		
Triple Glazed Section Through Width		
DRAWING NO.	SHEET	
602-SDD-UK-005	1 OF 1	

\*Glazed unit specification dependent on client options and glazing area