


GV STANDARD SLIDING OVER FIXED
ELECTRONICALLY OPERATED SLIDING ROOFLIGHT

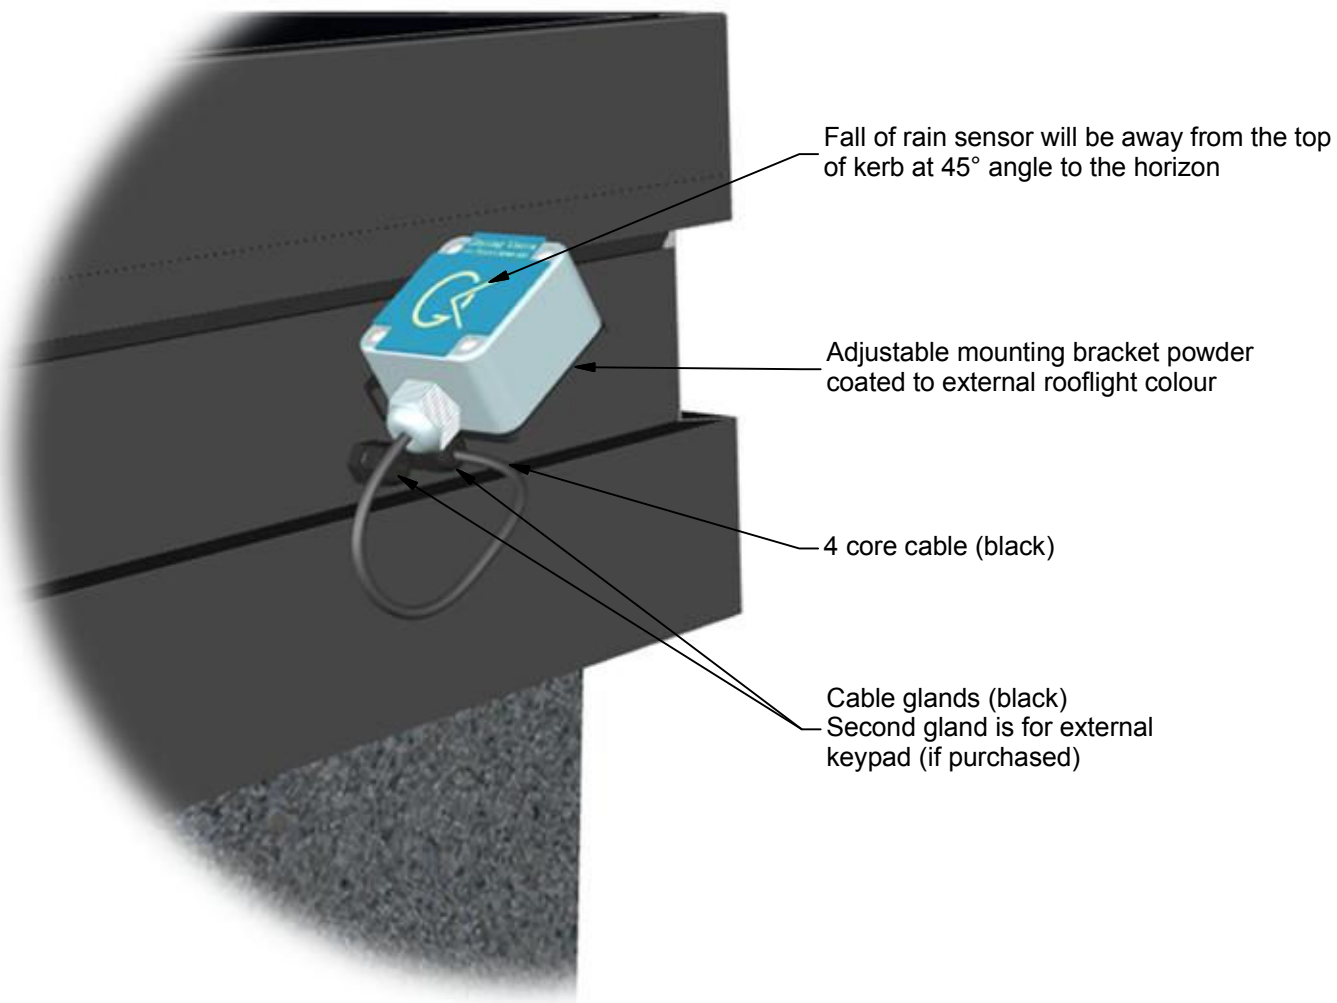


Fall of rain sensor will be away from the top of kerb at 45° angle to the horizon

Adjustable mounting bracket powder coated to external rooflight colour

4 core cable (black)

Cable glands (black)
Second gland is for external keypad (if purchased)

Plan view of Sliding Over Fixed

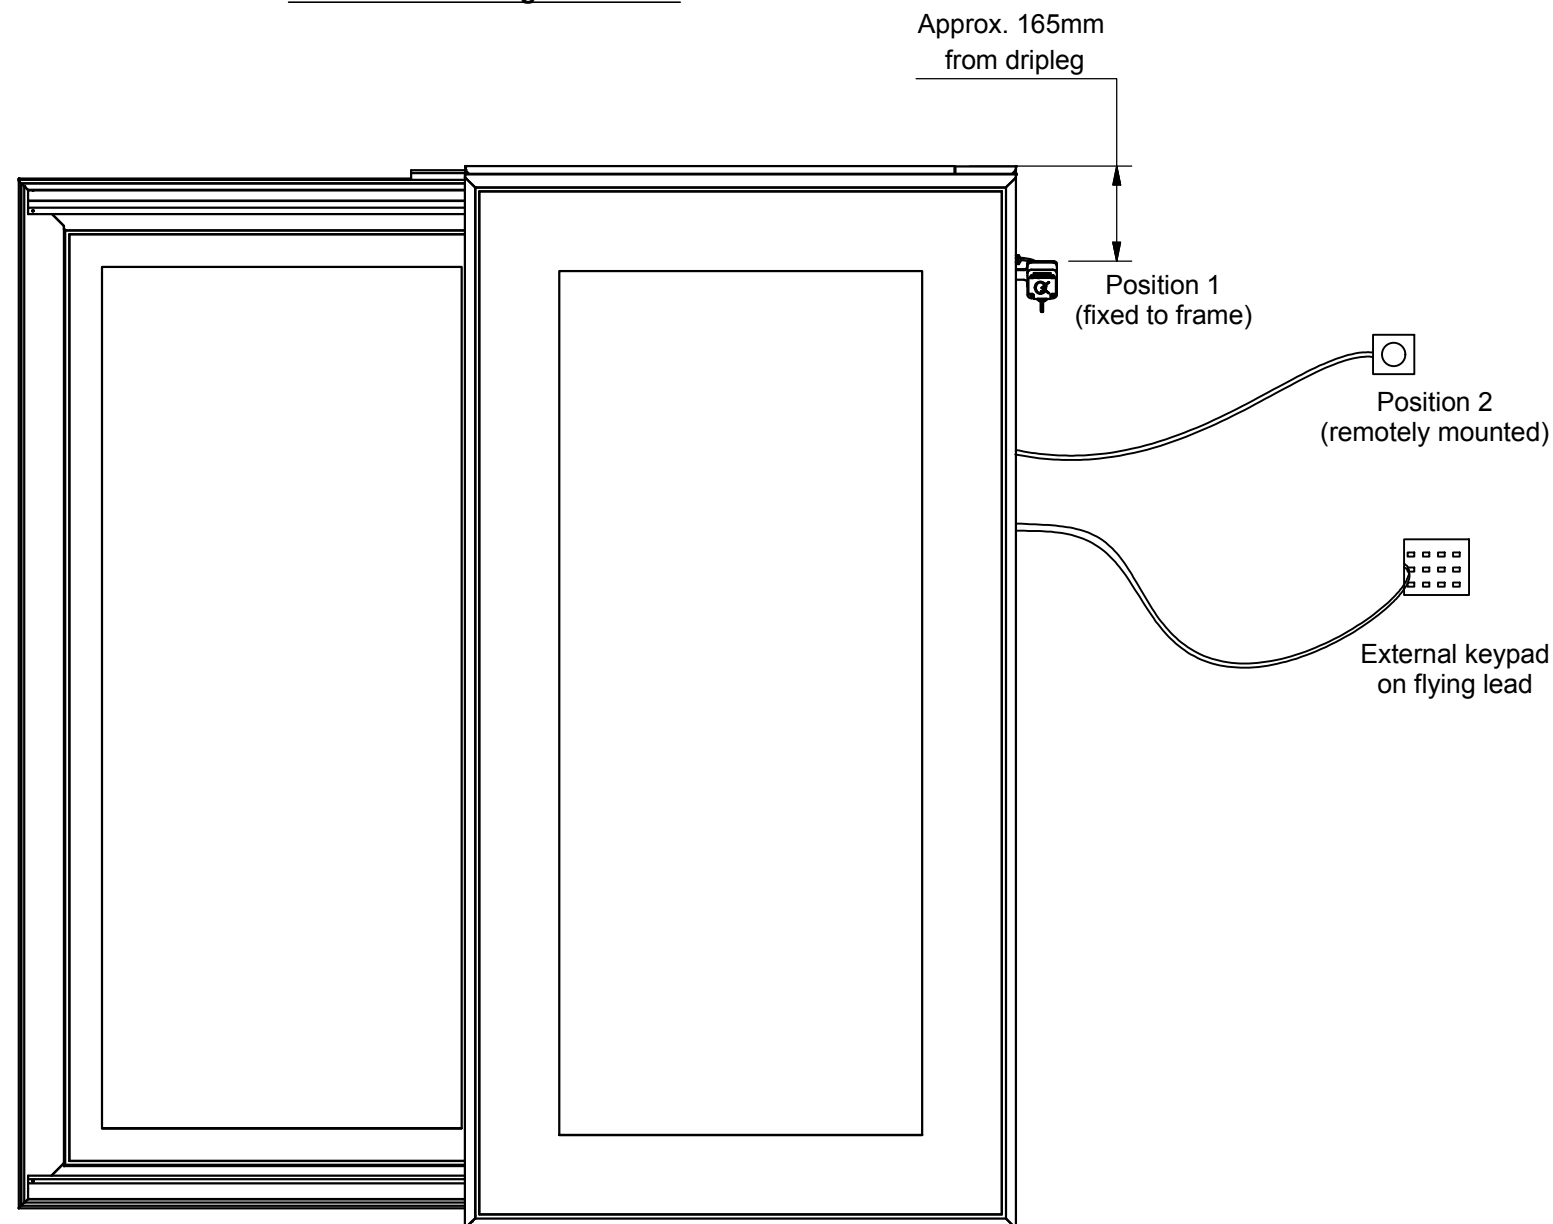

When a rain sensor is required the customer is to specify a mounting position at the time of order to maximise exposure to the elements and avoid being in the rain shadow of the building.

There are 2 positions for the rain sensor. Either fixed to rooflight (position 1) or externally mounted with flying lead (position 2).

External keypads are always remotely mounted and supplied with flying leads.

NOTE: The rain sensor and keypad are optional extras.

Rev	Revision Description	Drawn/Date
-	Initial release	PGW 25.02.2014
A	Rain sensor positions revised	SW 29.11.17

Product: 603 - GV Standard Sliding Over Fixed		Checked By: JSL
Description: Rain sensor and external keypad locations		
Materials: N/A	Drawn By: PGW	Check Date: 29.11.2017
Finish: N/A	Drawn Date: 25.02.2014	
Weight: N/A	Quantity: N/A	Drawing No: 603-ASS-401
Scale: NTS		